
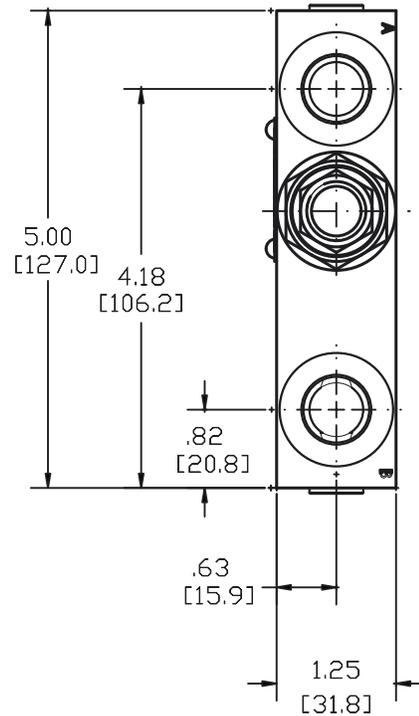
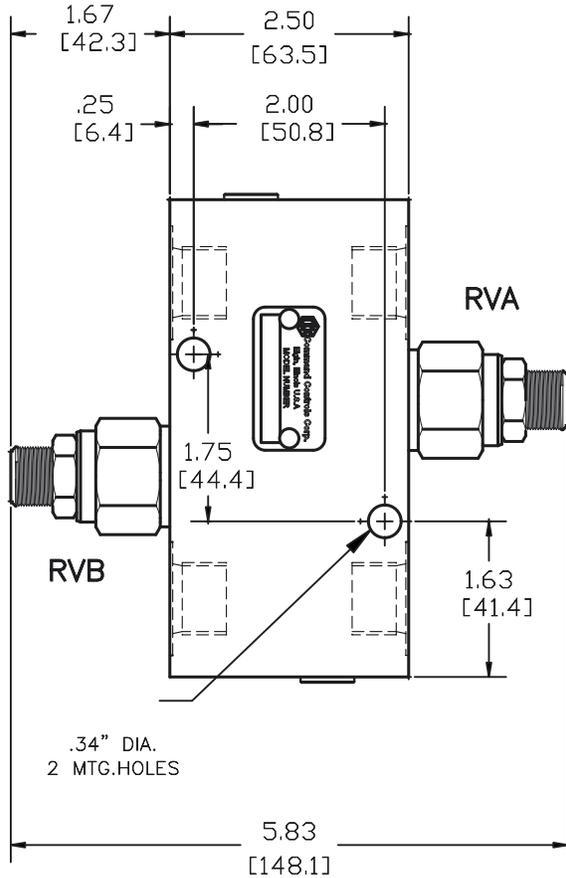



CROSS PORT RELIEF VALVE, DIRECT ACTING
DIFFERENTIAL AREA, POPPET TYPE



CPRV-10-X-X-0-RVA-RVB-RVA-RVB

BASIC _____
 SIZE _____
 10 = 7/8"-14 UNF
 SEALS _____
 N = BUNA "N"
 V = VITON
 ADJUSTMENT _____
 S = ADJUSTING SCREW
 C = CAPPED
 T = TAMPERPROOF
 K = HANDKNOB
 M = METAL HANDKNOB
 FOR ADJUSTMENT CONTROL
 OPTIONS SEE PAGE 0-050.0

OPTIONAL PRESSURE
 SETTING
 (PRESSURE/100)
 Ex.: 42.5 = 4250 PSI
 PRESSURE RANGE
 15 = 100 TO 1500 PSI
 30 = 300 TO 3000 PSI
 50 = 500 TO 5000 PSI
 PORTS
 08TX = SAE - #8
 "A" - ALUM. HOUSING
 "S" - STEEL HOUSING

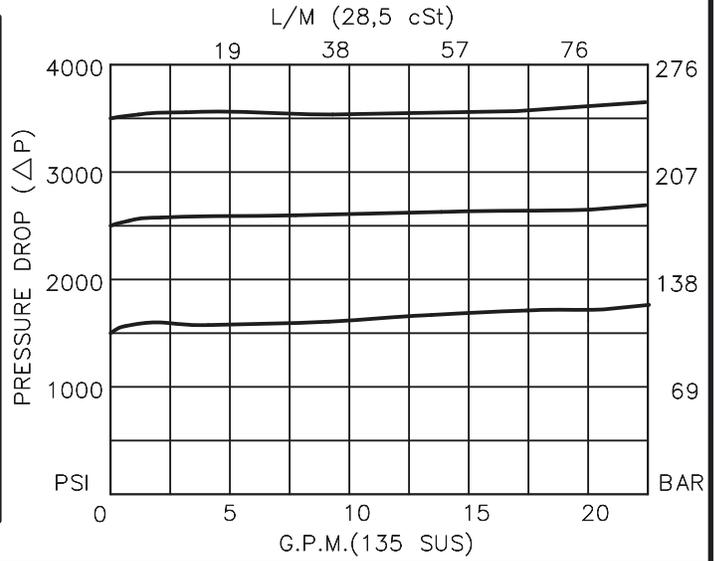

CROSS PORT RELIEF VALVE, DIRECT ACTING, POPPET TYPE**DESCRIPTION**

This unit consists of two RVDA cartridges in an inline housing. The cartridges are differential area, poppet type, bi-directional, adjustable, hydraulic pressure relief valves.

OPERATIONS

This manifold (CPRV) allows flow with minimal pressure drop through normally separated A and B thru ports. If pressure in either port exceeds its valve setting, flow will cross over to the other port.

FEATURES AND BENEFITS

Leakproof screw adjustment.
Adjustment screw can not be backed out of valve.
Overset protection – spring can not go solid.
Hardened precision fitted poppet & cage provides reliable, long life.
All external carbon steel parts are plated for longer life against the elements.
Valve is available with screw, tamperproof, capped and handknob adjustments.
All cartridge valves are 100% functionally tested.
Industry common cavity.

SPECIFICATIONS

OPERATING PRESSURE: 5,000 PSI [350 Bar]
PROOF PRESSURE: 10,000 PSI [700 Bar]
FLOW: 20.0 GPM [76 L/M] nominal. See performance chart.
INTERNAL LEAKAGE: 5 drops/min [.25 cc/m] @ 85% of crack pressure.
DEFINITION OF CRACK: evident at 0.06 GPM [0.25 LPM]
VALVE HOUSINGS: 2500 PSI [175 Bar] = Aluminum – Anodized.
5000 PSI [350 Bar] = Steel – Unplated.
OPERATING TEMPERATURE: -40° to +250° F. [-40° to +120° C.]
OPERATING MEDIA: All general purpose hydraulic fluids such as
MIL-H-5606, SAE-#10, SAE-#20, etc.
INSTALLATION: No restriction.
FILTRATION: 25 microns or better.
SEAL KIT NUMBER: SKN-1021 for Buna "N".
SKV-1021 for Viton.
WEIGHT: 2.65 lbs [1,21 kg] Aluminum. 5.25 lbs [2,38 kg] Steel.
VALVE CAVITY: #C1020, See Page 0-012.0.

NOTE: A 100 PSI pressure differential must be present between the two relief valve settings. If same setting is needed, use RVBD-10 cartridge.

info.el@bucherhydraulics.com

www.bucherhydraulics.com/commoncavity

© 2015 by Bucher Hydraulics, Inc., 2545 Northwest Parkway, Elgin, Illinois 60124, USA

All rights reserved.

Data is provided for the purpose of product description only, and must not be construed as warranted characteristics in the legal sense. The information does not relieve users from the duty of conducting their own evaluations and tests. Because the products are subject to continual improvement, we reserve the right to amend the product specifications contained in this catalogue.