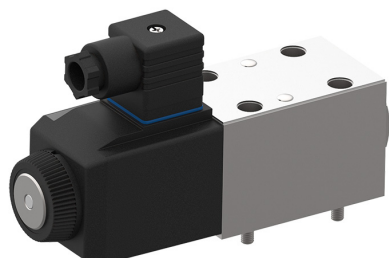


4/3 and 4/2 Directional Spool Valves, ISO Size 03

$Q_{\max} = 40 \text{ l/min}$, $p_{\max} = 350 \text{ bar}$

Direct acting, soft switching, solenoid operated

Series WEDOU...



- For controlling the starting, stopping, and direction of a flow
- Manifold-mounting design, interface to ISO 4401-03-02
- Operated by DC or AC solenoids
- Very reliable functions and extremely stable
- With manual override
- Solenoid coils can be changed quickly and easily without leakage from hydraulics system.

1 Description

The WEDOU-...-6... series of directional spool valves are solenoid operated, direct acting, manifold-mounting valves with a size 03 interface to ISO 4401-03-02. The main components of the valves are a steel body, either one or two solenoids, the control spool, and either one or two return springs. In the non-operated state, the return springs hold the control spool in the middle position or initial position. The control spool is operated by the DC or AC solenoids, which

are of the oil-immersed type. The integral manual override can be used to move the spool without energising the coil, for example during a power failure. These 4/3 and 4/2 directional valves are used in plant and machines to control the direction of a flow, and to stop the flow. The slip-on coils can be replaced without opening the hydraulic envelope and can be positioned at any angle through $4 \times 90^\circ$.
















2 Technical data

General characteristics	Description, value, unit
Designation	4/3 and 4/2 directional spool valves
Design	flange design, direct acting, soft switching, electrically operated
Mounting method	4 mounting holes for M5x30 mounting bolts (valve mounting bolts supplied with the valve)
Tightening torque	5.2 Nm \pm 10 %
Size	size 03 interface to ISO 4401-03-02
Weight	- valve with one solenoid - valve with two solenoids
	1.70 kg 2.10 kg
Mounting attitude	horizontal recommended (vertical mounting makes air bleeding difficult)
Ambient temperature range	-20 °C ... +80 °C

Hydraulic characteristics	Description, value, unit
Maximum operating pressure - ports A, B, P - port T	350 bar 100 bar
Maximum flow rate	40 l/min
Flow direction	see table "Symbols / Spool types"
Hydraulic fluid	HL and HLP mineral oil to DIN 51 524; HEES biodegradable fluids; for other fluids, please consult BUCHER
Hydraulic fluid temperature range	-20 °C ... +80 °C
Viscosity range	10...500 mm ² /s (cSt), recommended 15...250 mm ² /s (cSt)
Minimum fluid cleanliness Cleanliness class to ISO 4406 : 1999	class 20/18/15

Electrical characteristics	Description, value, unit
Standard Supply voltage	12 V DC, 24 V DC / 110 V AC, 220 V AC (50 ... 60 Hz)
Supply voltage tolerance	± 10 %
Ambient temperature range	-20 °C ... +50 °C
Nominal power consumption	DC 30/31 W AC energising 225 VA (RMS) / holding 39 VA (RMS)
Relative duty cycle	100 %
Protection class to ISO 20 653 / EN 60 529	IP65 (with appropriate mating connector and proper fitting and sealing)
Electrical connection	DIN EN 175301-803, 3-pin 2 P+E (standard) for other connectors, see "Ordering code"

3 Symbols / Spool types


4/2 functions	4/2 functions with 4/3 spool types	4/2 functions with 4/3 spool types	4/3 functions
 WEDOU-42-A...	 WEDOU-42-AD...	 WEDOU-42-BD...	 WEDOU-43-D...
	 WEDOU-42-AG...	 WEDOU-42-BG...	 WEDOU-43-G...
 WEDOU-42-B...	 WEDOU-42-AH...	 WEDOU-42-BH...	 WEDOU-43-H...
 Crossover positions	 WEDOU-42-AJ...	 WEDOU-42-BJ...	 WEDOU-43-J...

4 Performance graphs

measured with oil viscosity 33 mm²/s (cSt), coil at steady-state temperature and 10 % undervoltage


$\Delta p = f(Q)$ Pressure drop - Flow rate characteristic

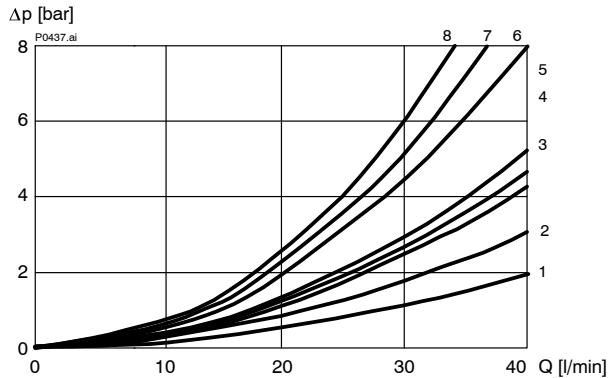A, B, C, D, F, G, H and J spool



Spool type	Flow direction			
	P ⇒ A	B ⇒ T	P ⇒ B	A ⇒ T
A	8	7	4	2
B	8	7	4	2
D	5	4	5	4
G	5	1	5	1
H	5	1	5	1
J	6	3	6	3

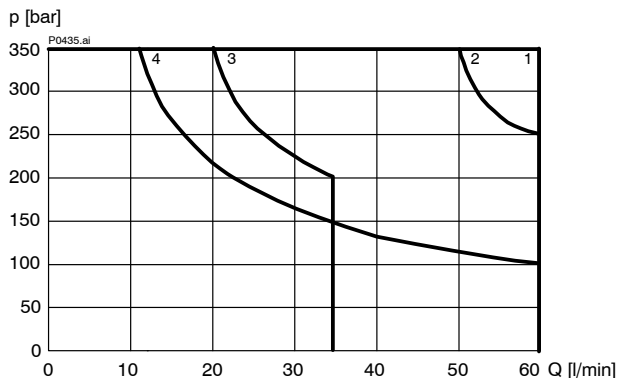$p = f(Q)$ Performance limits - w/ith DC-solenoid coil operating at 50 Hz



Spool type	Flow direction
A	4
B	4
D	1
G	2
H	5
J	3



IMPORTANT!

The quoted max. flow rates apply when symmetrical flows pass through the valve.

For non-symmetrical flows, the max. flows are substantially reduced, in worst cases to only 33% of the above valves.

Switching times

measured with D spool at Q = 20 l/min, p = 210 bar
100% voltage, oil temperature +38° C, viscosity 21 cSt

Orifice diameter [mm]	SWITCHING TIME		COLOUR
	ON [ms]	OFF [ms]	
0,7 (standard)	625	550	Green
ø,8	400	375	Blue
0,9	250	250	Red

Switching times are influenced by flow rate, pressure, viscosity, supply voltage and coil temperature.

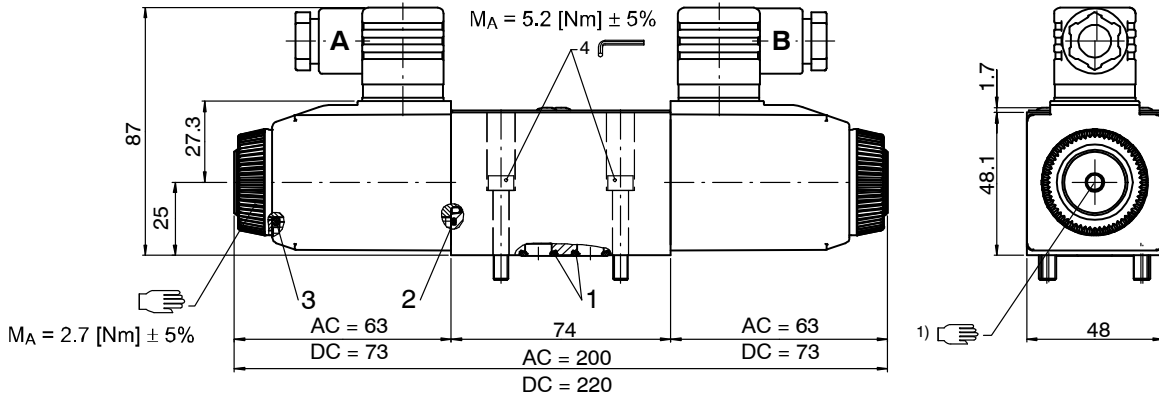
To achieve switching times which are least influenced by variations in supply voltage and coil temperature, we recommend the use of our specially developed connector plug, type LRS (see data sheet P-20).

When the valve is to be supplied with an orifice size other than 0.7 mm, this must be clearly specified on the order: e.g. WEDOU-43-G-6-V 24 VDC with ø 0.9 mm orifice.


5 Dimensions & sectional view

4/3 spool valve (spring centred)

4/2 spool valve (pulse signal, detented)



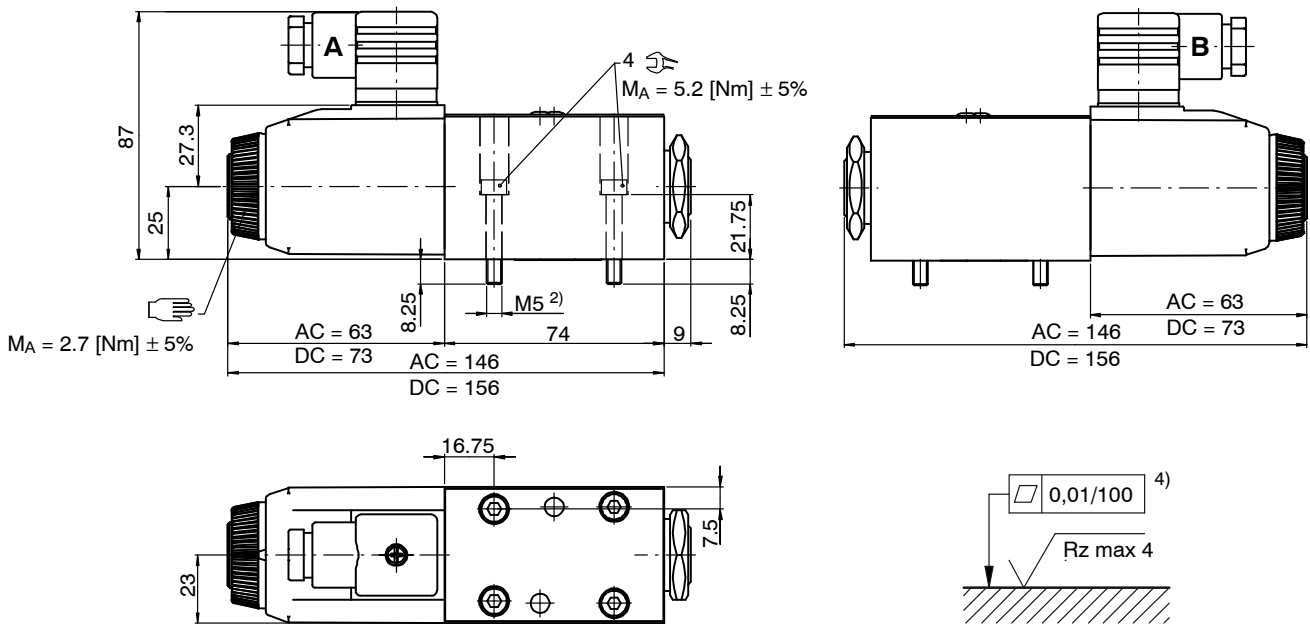4/2 spool valve (1-solenoid model, A or B side)



Seal kit NBR no. DS-225-V ³⁾

Item	Qty. 5)	Qty. 6)	Description
1	4	4	O-ring no. 012 $\varnothing 9,25 \times 1,78$ V70
2	1	2	O-ring no. 022 $\varnothing 25,12 \times 1,78$ V70
3	1	2	O-ring no. 213 $\varnothing 23,39 \times 3,53$ V70



IMPORTANT!

- 1) With manual override
- 2) Valve mounting bolts M5x30 (included in the delivery)
- 3) Seal kit with FKM (Viton) seals no. DS-225-V
- 4) Required surface finish on the mounting face (valve pad)
- 5) 4/2 valves (1 solenoid)
- 6) 4/3 valves (2 solenoid)

6 Installation information



ATTENTION!

Only qualified personnel with mechanical skills may carry out any maintenance work. Generally, the only work that should ever be undertaken is to check, and possibly replace, the seals. When changing seals, oil or grease the new seals thoroughly before fitting them.



IMPORTANT!

When fitting the valves, use the specified tightening torque for the mounting bolts. No adjustments are necessary, since the cartridges are set in the factory.

7 Ordering code

Ex.

WEDO	U	-	43	-	G	-	6	V	-	2	24	D	_
------	---	---	----	---	---	---	---	---	---	---	----	---	---

WEDO	=	directional valve, solenoid operated, direct acting
U	=	soft switching
42	=	4/2 function (2 operating positions)
43	=	4/3 function (3 operating positions)
...	=	spool type / symbol to section 3 – page 3 (e.g. AD, D, etc.)
6	=	ISO size 03 interface
V	=	FKM (Viton) seals (standard) (special seals - please contact BUCHER)
1 ... 9	=	design stage (omit when ordering new units)
...	=	voltage e.g. 24 (24 V)
D	=	current DC
A	=	current AC
(blank)	=	DIN EN 175301-803 connection with mating plug (standard , IP 65)
M100	=	DIN EN 175301-803 connection without mating plug
<i>for additional plug-variants, please consult Bucher:</i>		

8 Related data sheets

Reference	(Old no.)	Description
400-P-030101	(i-30)	Size 03 interface to ISO 4401-03-02

info.ch@bucherhydraulics.com

www.bucherhydraulics.com

© 2021 by Bucher Hydraulics AG Frutigen, CH-3714 Frutigen

All rights reserved.

Data is provided for the purpose of product description only, and must not be construed as warranted characteristics in the legal sense. The information does not relieve users from the duty of conducting their own evaluations and tests. Because the products are subject to continual improvement, we reserve the right to amend the product specifications contained in this catalogue.

Classification: 430.300.-.315.305.300