

## 3.25 Model M-3551-HF (High Flow)



### Description

- Pump / Motor / Reservoir / High Flow Valves
- Externally Adjustable Relief Valve
- Main Check Valve
- Total Pressure Drop Thru Base Without Press Comp. Flow Control Installed <150 PSI.(6.9 Bar) at 8 GPM (30 LPM) for Fast and Controlled Lowering Speed
- 1 x 4-Way/2 Position and 1 x 2-Way/2 Position Normally Closed High Flow Solenoid Cartridge Valves Located in the Base (Maximum Lowering Speed Set by Pressure Compensated Orifice
- C1 Port Positively Checked
- Pressure Compensated (Cartridge Style) Orifice in C1 Port For Control of Maximum Lowering Speed
- Externally Adjustable Low Pressure Relief Valve in C2 Port For System Efficiency and Safety
- Horizontal Mounting Standard
- #8 (3/4-16) SAE Outlet

### Popular Options

- Control Box and Cord
- Vertical Mounting / Motor Up

### Schematic

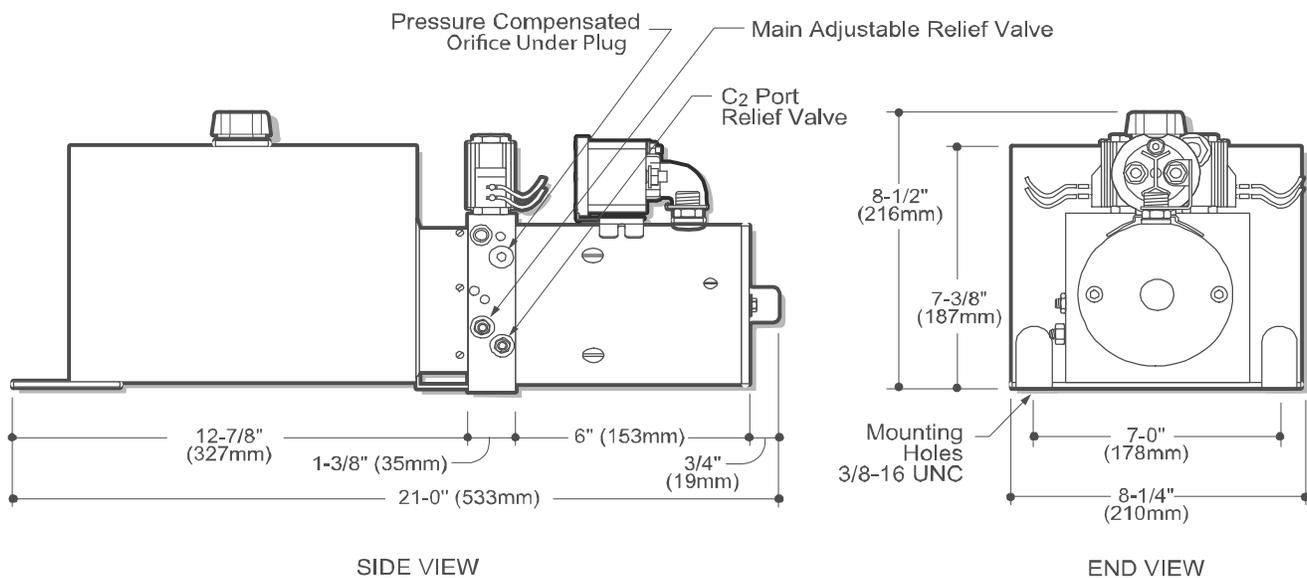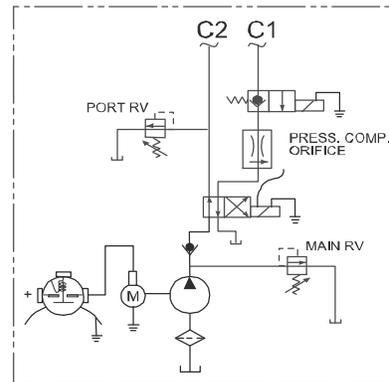

### How to Order Your M-3551-HF

Comprehensive information may be found on the page referenced below each selection category.

Shown as standard with:

Pump	Motor	Voltage	Reservoir (Length)	Motor Start Switch	Control Boxes	Mounting Bracket	Mounting Position	Accessories
	08111	12	06328	17757	07995		Horizontal	
Ref. Page	Ref. Page 52		Ref. Page 76-86	Ref. Page 89	Ref. Page 90	Ref. Page 91		Ref. Page 92