

3.30 Model M-683

Description

- Pump / Motor / Reservoir / Valve
- Check Valve
- 1 4-Way/2-Position and 3 x 2-Way/2-Position N.C. Solenoid Cartridge Valves Located Inside Reservoir provide 4W/3W Function
- All Ports Filtered
- By-Pass (Also Referred to as Cross-Over) Relief Valves Are Located Between C1 and C2 Ports
- Cord with Connector Plug
- Externally Adjustable Relief Valve
- .250 Inch NPT Outlets
- Horizontal Mounting Standard



Popular Options

- Control Box
- Vertical Mounting / Motor Up

Typical Application

- Snow Plow. Up. Down. Float; Left. Right

Schematic

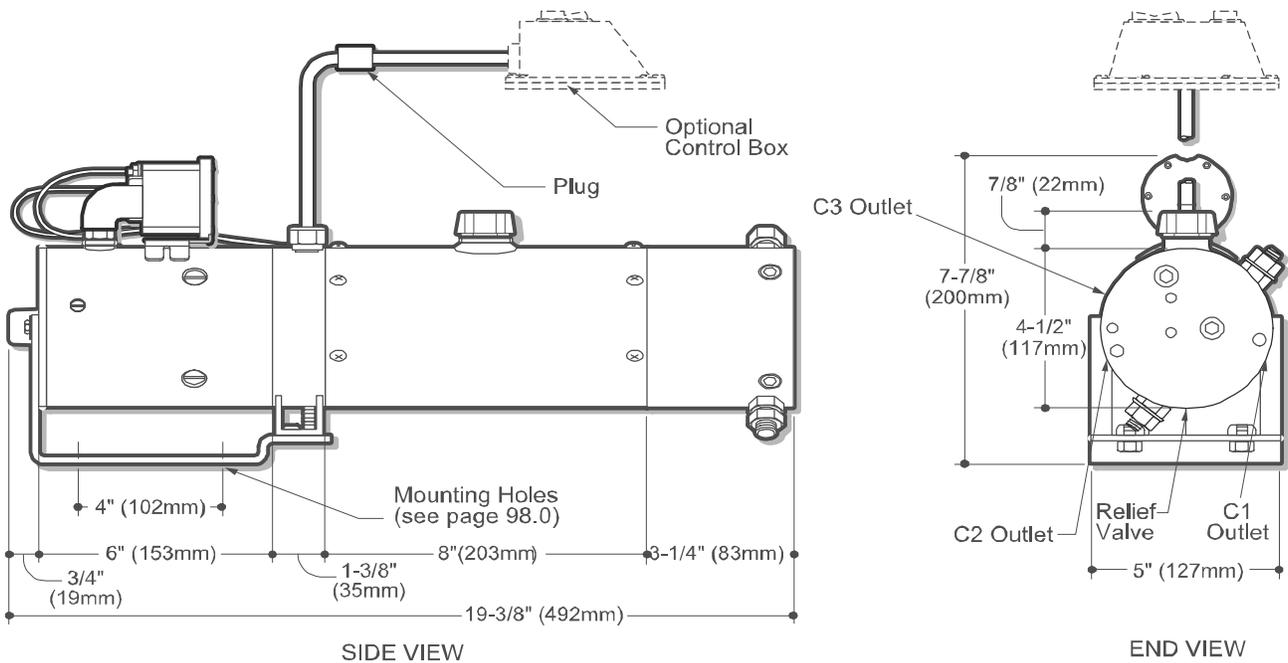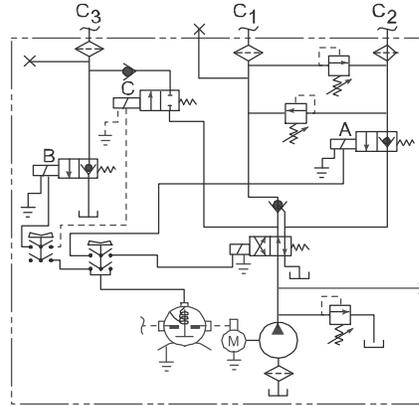

How to Order Your M-683

Comprehensive information may be found on the page referenced below each selection category.

Shown as standard with:

Pump	Motor	Voltage	Reservoir (Length)	Motor Start Switch	Control Boxes	Mounting Bracket	Mounting Position	Accessories
	08111	12	06703	17757	03197	02238	Horizontal	
Ref. Page	Ref. Page 52		Ref. Page 76-86	Ref. Page 89	Ref. Page 90	Ref. Page 91		Ref. Page 92