

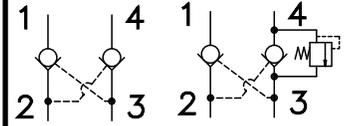
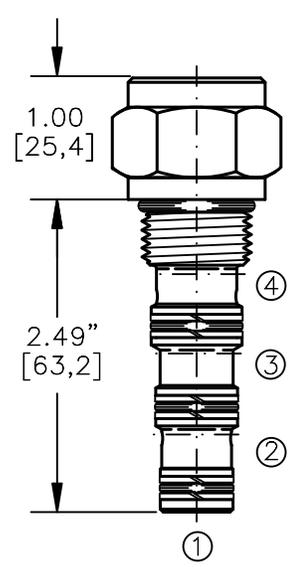


PILOT OPERATED DUAL CHECK VALVE
WITH OPTIONAL THERMAL RELIEF

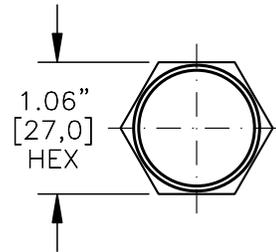

TORQUE:

Steel = 55/60 Ft-Lb. [74/81 Nm]
Aluminum = 35/40 Ft-Lb. [47/54 Nm]

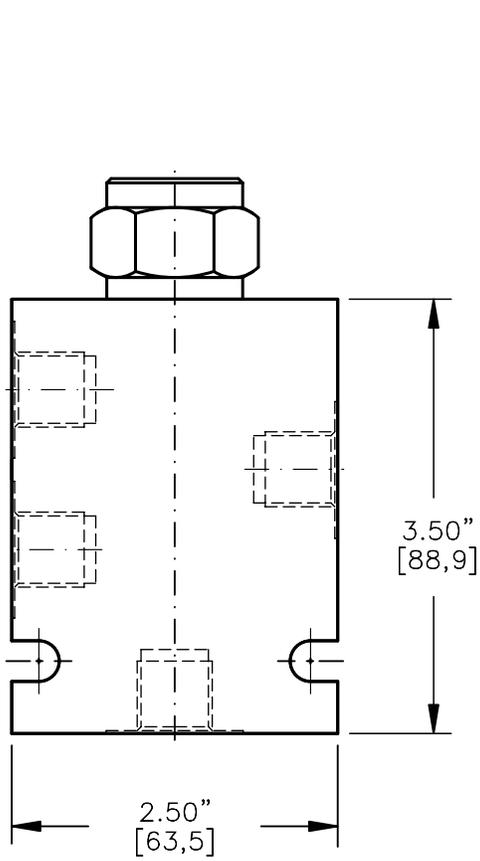

FOR ALUMINUM OR STEEL VALVE HOUSING CONFIGURATIONS SEE PAGE 0-042.1

POCD-10-X-X-X

BASIC

SIZE

10 = 7/8"-14 UNF

SEALS

N = BUNA "N"
V = VITON


TYPE

C = NO THERMAL RELIEF
3 = 3000 PSI RELIEF
5 = 5000 PSI RELIEF

PORTS

0 = CARTRIDGE ONLY
02BX = G 1/4" BSPP
03BX = G 3/8" BSPP
06TX = SAE - #6
08TX = SAE - #8

"A" - ALUM. HOUSING
"S" - STEEL HOUSING

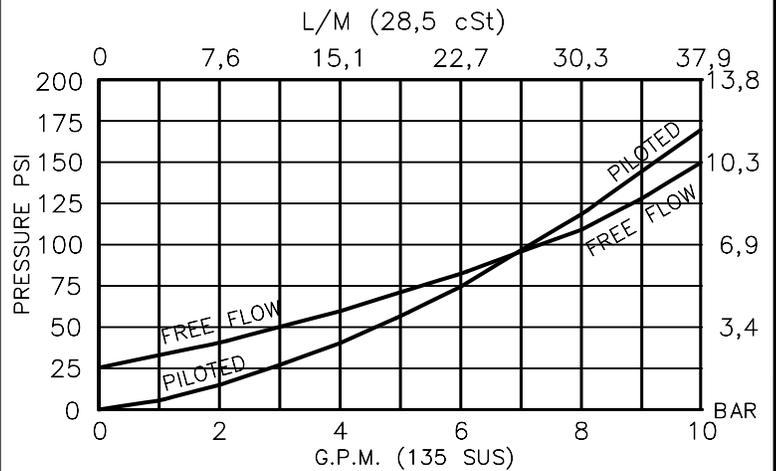

PILOT OPERATED DUAL CHECK VALVE WITH OPTIONAL THERMAL RELIEF

DESCRIPTION

This unit is a SCREW IN, cartridge type, guided poppet, hydraulic pilot operated dual check valve, for use as a blocking or load holding device for high pressure applications. Thermal relief option available in one direction.

OPERATIONS

This check valve allows free flow from port 2 to port 1 and from port 3 to port 4. It blocks flow from port 1 to port 2 and from port 4 to port 3 or holds a load. Flow will be allowed from port 1 to port 2 when pilot pressure is applied to port 3 that is higher than one-third of the load pressure at port 1. Flow will be allowed from port 4 to port 3 when pilot pressure is applied to port 2 that is higher than one-third of the load pressure at port 4.

This pilot operated check valve has a 3 to 1 pilot ratio. Port 4 can be equipped with a thermal relief. The relief is set to open when the pressure in port 4 exceeds the relief setting.

FEATURES AND BENEFITS

All external carbon steel parts are plated for longer life against the elements. All cartridge valves are 100% functionally tested. Industry common cavity.

SPECIFICATIONS

OPERATING PRESSURE: 5,000 PSI [350 Bar]

PROOF PRESSURE: 10,000 PSI [700 Bar]

FLOW: 10.0 GPM [37.9 l/m] nominal. See performance chart.

PILOT RATIO: 3 TO 1

INTERNAL LEAKAGE: 5 drops per minute maximum @ 5,000 PSI [350 Bar]

VALVE HOUSINGS: 2500 PSI [175 Bar] = Aluminum – Anodized.

5000 PSI [350 Bar] = Steel – Unplated.

OPERATING TEMPERATURE: -40° to +250° F. [-40° to +120° C.]

OPERATING MEDIA: All general purpose hydraulic fluids such as MIL-H-5606, SAE-#10, SAE-#20, etc.

INSTALLATION: No restrictions.

SEAL KIT: SKN-1042 Buna "N"

SKV-1042 Viton

WEIGHT: .40 lb. [.19 kg] cartridge only.

VALVE CAVITY: #C1040, See Page 0-042.0.

info.el@bucherhydraulics.com

www.bucherhydraulics.com/commoncavity

© 2015 by Bucher Hydraulics, Inc., 2545 Northwest Parkway, Elgin, Illinois 60124, USA

All rights reserved.

Data is provided for the purpose of product description only, and must not be construed as warranted characteristics in the legal sense. The information does not relieve users from the duty of conducting their own evaluations and tests. Because the products are subject to continual improvement, we reserve the right to amend the product specifications contained in this catalogue.