


# General information

## Cavity

Type series: AT/C1040

Dimensions and sectional view

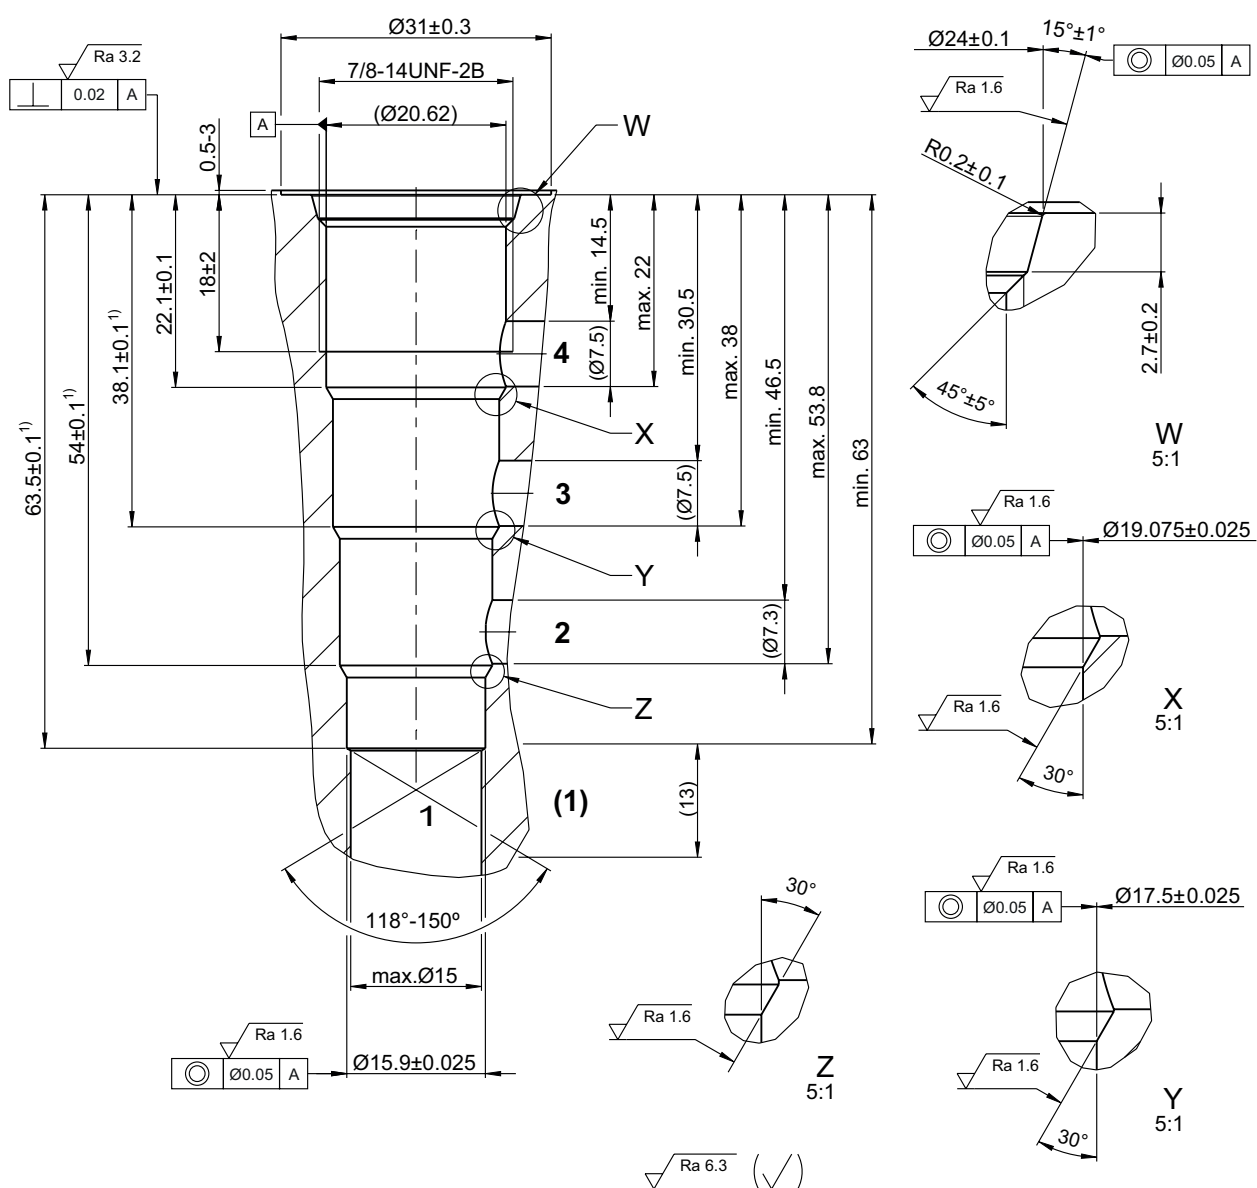

### HINWEIS! NOTE!

<sup>1)</sup> Passungstiefe  
Minimum depth of specified diametral tolerance

**Beispiel für die Masseinheit:  
Example for the dimensional units:**

0.79 = 0.79 mm millimeter

## Installation information

**ATTENTION!**

You must maintain the specified positional and diametral tolerances. To ensure trouble-free operation of the screw-in cartridges, we strongly recommend that pilot drilling, boring, reaming and cavity thread-cutting are always performed in one setup.

**NOTE!**

The cavity type AT/C1040 complies with the standard according to: ISO 17209: 7/8-04-0-13 and NFPA/T3.5.50: 0.875-04-0-09.

**NOTE!**

We offer form tool sets for sale or hire. For further information, see data sheet 400-P-040011.