


# General information Cavity

Type series: AX/C1020

# Dimensions and sectional view

Beispiel für die Masseinheit: Example for the dimensional units: 0.79 = 0.79 mm millimeter

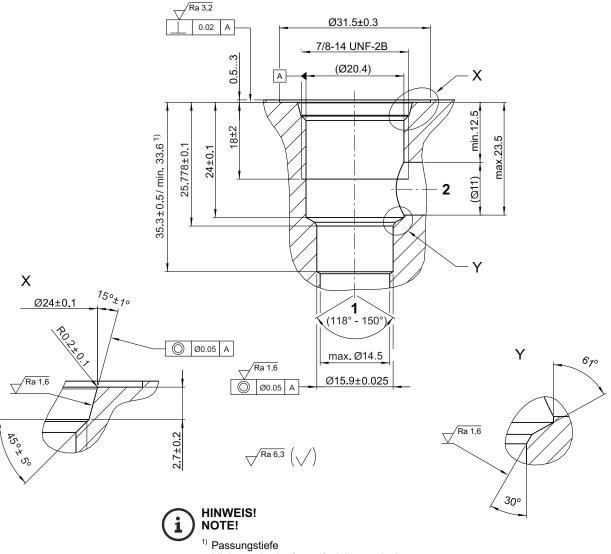

Minimum depth of specified diametral tolerance



## Installation information



# ATTENTION!

You must maintain the specified positional and diametral tolerances. To ensure troublefree operation of the screw-in cartridges, we strongly recommend that pilot drilling, boring, reaming and cavity thread-cutting are always performed in one setup.



i

# NOTE!

Cavity type to factory standard.

### NOTE!

We offer form tool sets for sale or hire. See data sheet 400-P-040011 for further information.

#### info.ch@bucherhydraulics.com

#### www.bucherhydraulics.com

#### © 2025 by Bucher Hydraulics AG Frutigen, 3714 Frutigen, Switzerland

#### All rights reserved.

Data is provided for the purpose of product description only, and must not be construed as warranted characteristics in the legal sense. The information does not relieve users from the duty of conducting their own evaluations and tests. Because the products are subject to continual improvement, we reserve the right to amend the product specifications contained in this catalogue.