


General information

Cavity

Type series: DP

Dimensions and sectional view

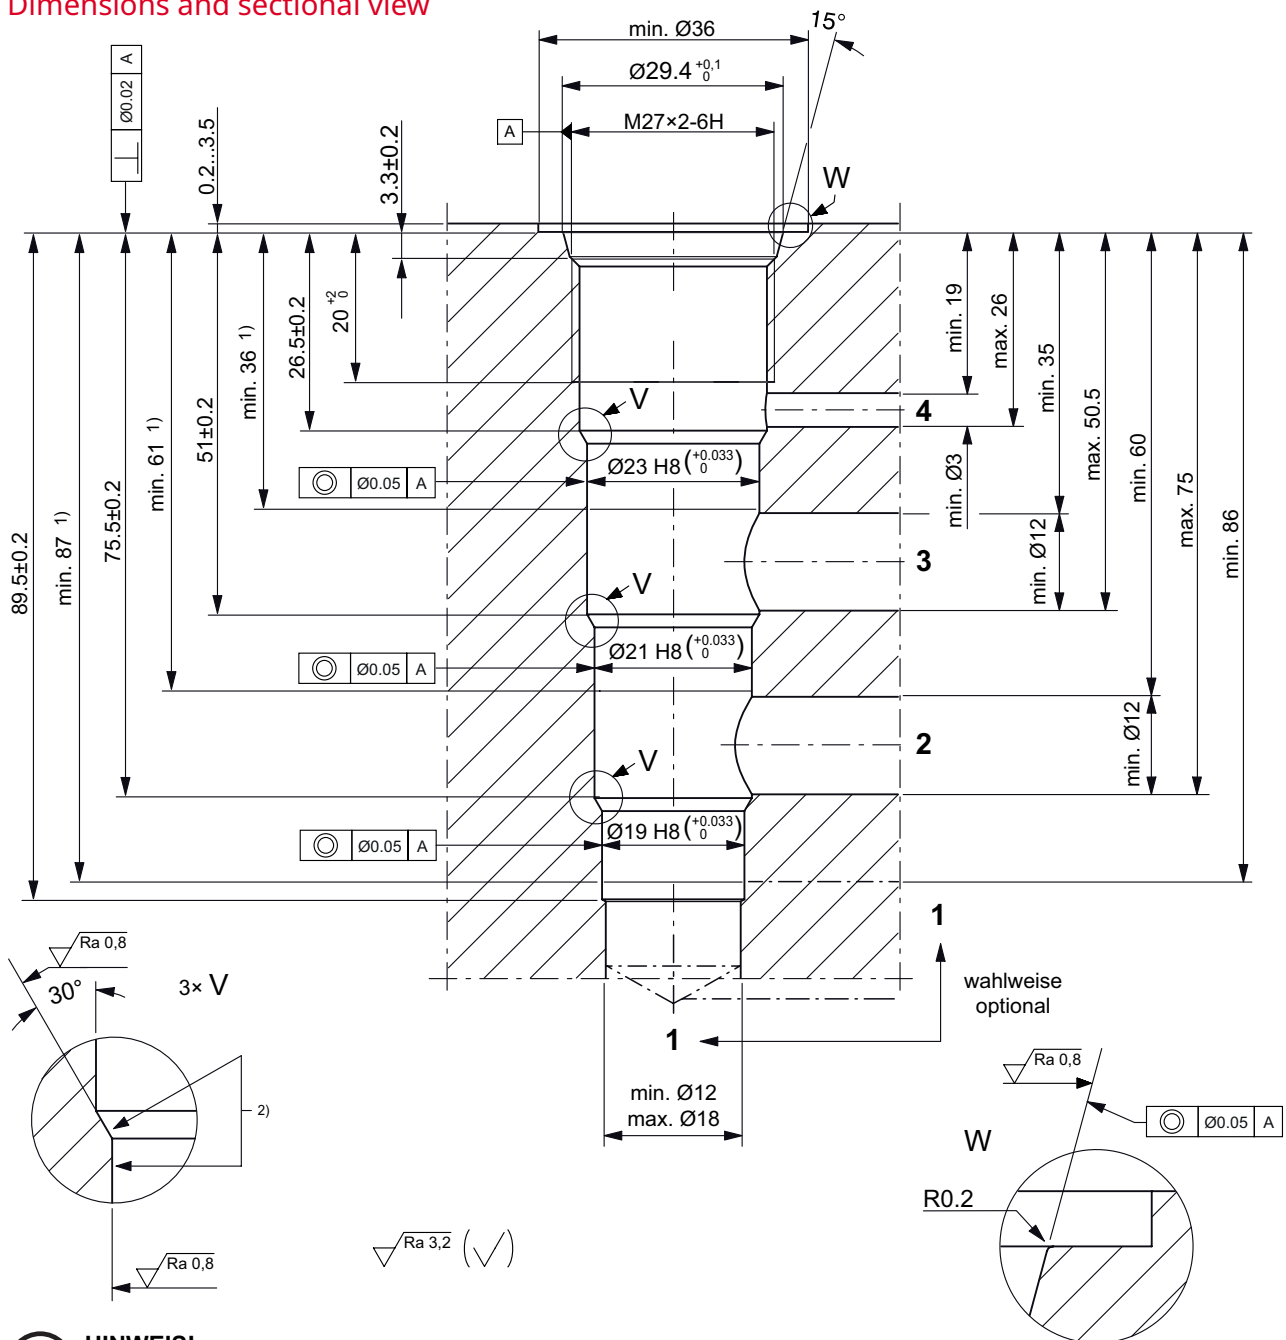

**HINWEIS!
NOTE!**

- 1) Passungstiefe
Minimum depth of specified diametral tolerance
- 2) Der Gewindeauslauf darf die Ringfläche und $\varnothing 23 H8$ nicht verletzen.
The thread runout must not damage the ring surface or the $\varnothing 23 H8$.

**Beispiel für die Masseinheit:
Example for the dimensional units:**
0.79 = 0.79 mm millimeter

Installation information

**ATTENTION!**

You must maintain the specified positional and diametral tolerances. To ensure trouble-free operation of the screw-in cartridges, we strongly recommend that pilot drilling, boring, reaming and cavity thread-cutting are always performed in one setup.

**NOTE!**

The cavity type DP complies with the standard according to ISO 7789: 27-09-0-07.

**NOTE!**

We offer form toolsets for sale or hire. For further information, see data sheet 400-P-040011.