


General information

Cavity

Type series: GP/C0830

Dimensions and sectional view

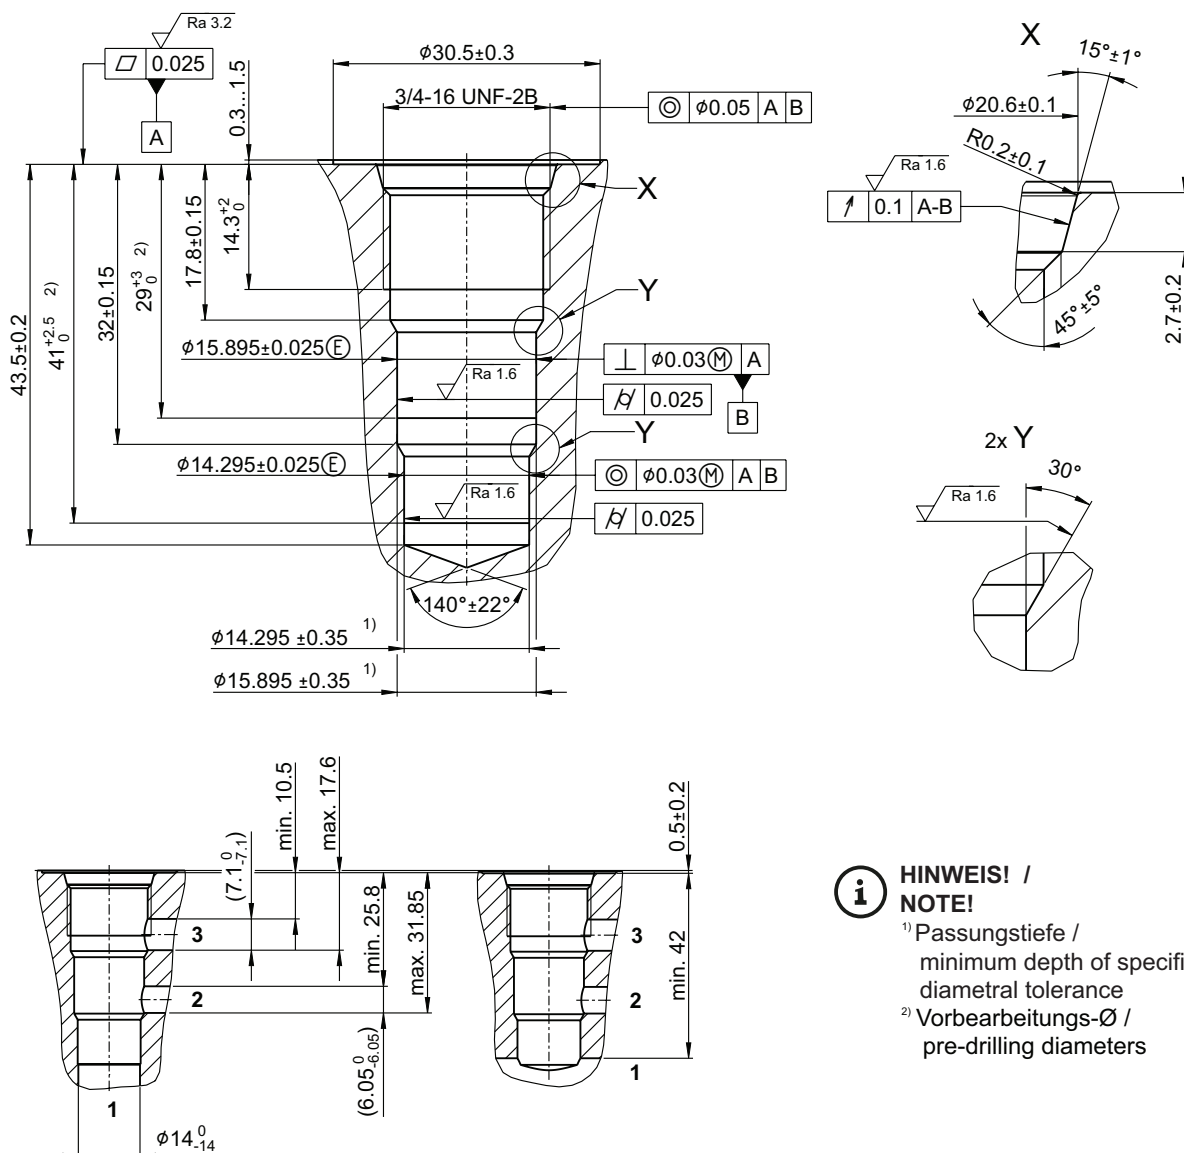

HINWEIS! / NOTE!

- ¹⁾ Passungstiefe / minimum depth of specified diametral tolerance
- ²⁾ Vorbearbeitungs-Ø / pre-drilling diameters

Installation information



ATTENTION!

You must maintain the specified positional and diametral tolerances. To ensure trouble-free operation of the screw-in cartridges, we strongly recommend that pilot drilling, boring, reaming and cavity thread-cutting are always performed in one setup.



NOTE!

The cavity type GP/C0830 complies with the standard according to ISO 17209: 3/4-03-0-13 and NFPA/T3.5.50: 0.750-03-0-09.



NOTE!

We offer form toolsets for sale or hire. For further information, see data sheet 400-P-040011.