


General information Cavity

Type series: HF/C1220A

Dimensions and sectional view



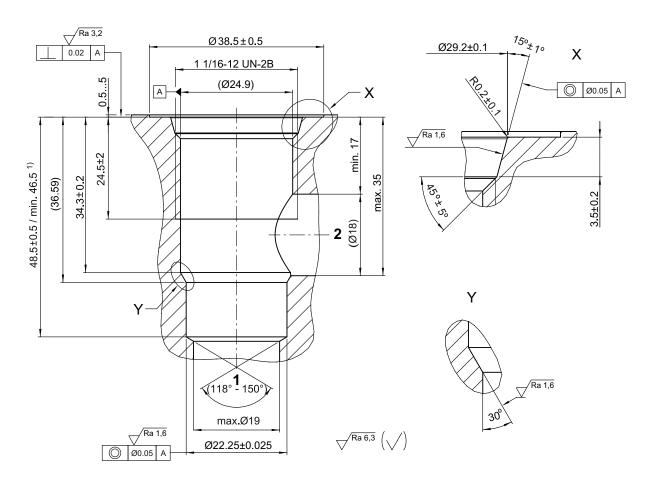

Beispiel für die Masseinheit: Example for the dimensional units: 0.79 = 0.79 mm millimeter



Installation information



ATTENTION!

You must maintain the specified positional and diametral tolerances. To ensure trouble-free operation of the screw-in cartridges, we strongly recommend that pilot drilling, boring, reaming and cavity thread-cutting are always performed in one setup.



NOTE!

The cavity type HF/C1220A complies with the standardaccordingto:ISO17209:11/16-01-0-13.



NOTE!

Weofferformtoolsetsforsale or hire. For further information, see data sheet 400-P-040011.

info.ch@bucherhydraulics.com

www.bucherhydraulics.com

© 2023 by Bucher Hydraulics AG Frutigen, 3714 Frutigen, Switzerland

All rights reserved.

Data is provided for the purpose of product description only, and must not be construed as warranted characteristics in the legal sense. The information does not relieve users from the duty of conducting their own evaluations and tests. Because the products are subject to continual improvement, we reserve the right to amend the product specifications contained in this catalogue.

Type series: HF/C1220A 2/2 Reference: 400-P-065111-EN-01/03.2023