


General information

Cavity

Type series: AM

Dimensions and sectional view

Beispiel für die Masseinheit:
Example for the dimensional units:
0.79 = 0.79 mm millimeter

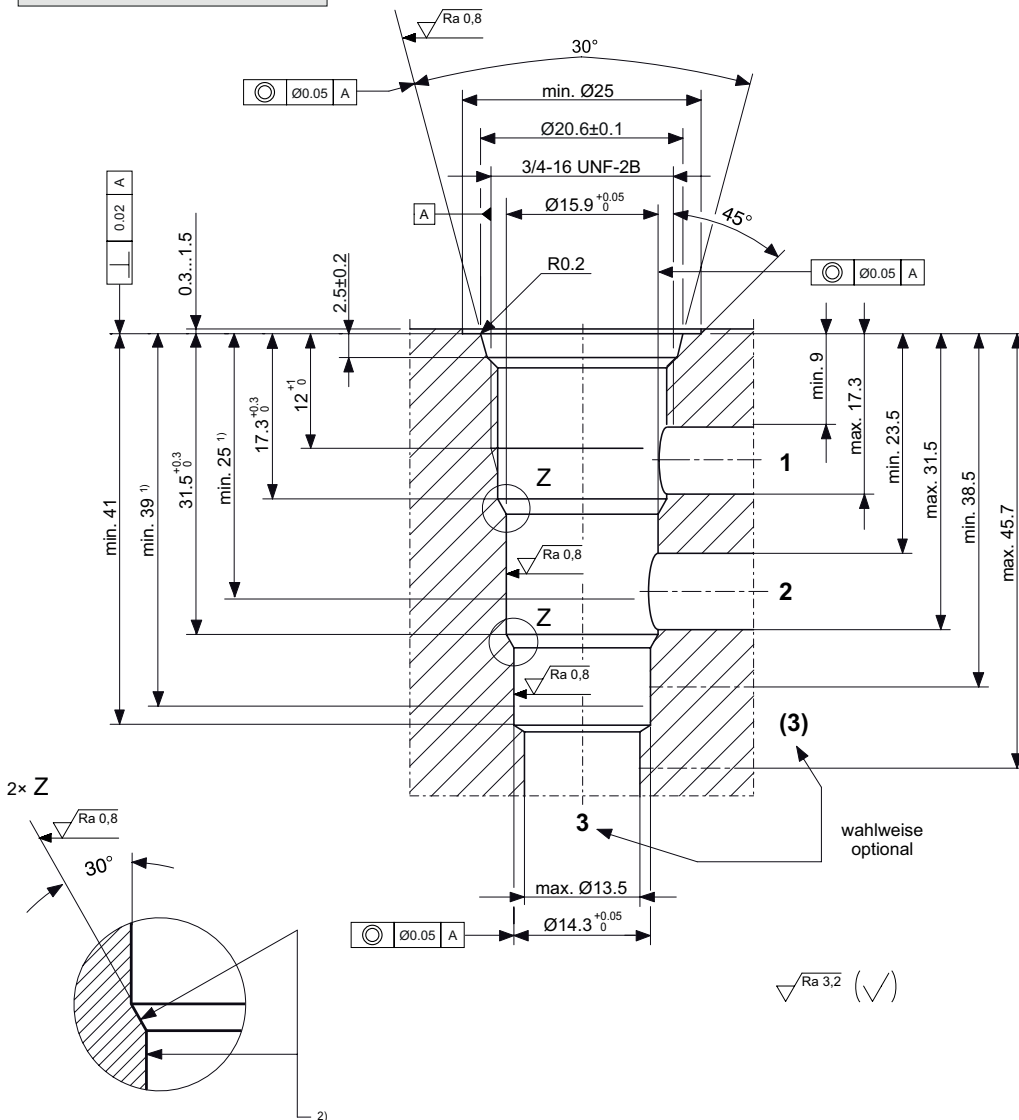

**HINWEIS!
NOTE!**

- 1) Passungstiefe
Minimum depth of specified diametral tolerance
- 2) Der Gewindegang darf die Ringfläche und Ø15.9 nicht verletzen.
The thread runout must not damage the ring surface or the Ø15.9.

Installation information



ATTENTION!

You must maintain the specified positional and diametral tolerances. To ensure trouble-free operation of the screw-in cartridges, we strongly recommend that pilot drilling, boring, reaming and cavity thread-cutting are always performed in one setup.



NOTE!

We offer form tool sets for sale or hire. For further information, see data sheet 400-P-040011.