


General information

Cavity

Type series: Cavity C0430

Dimensions and sectional view

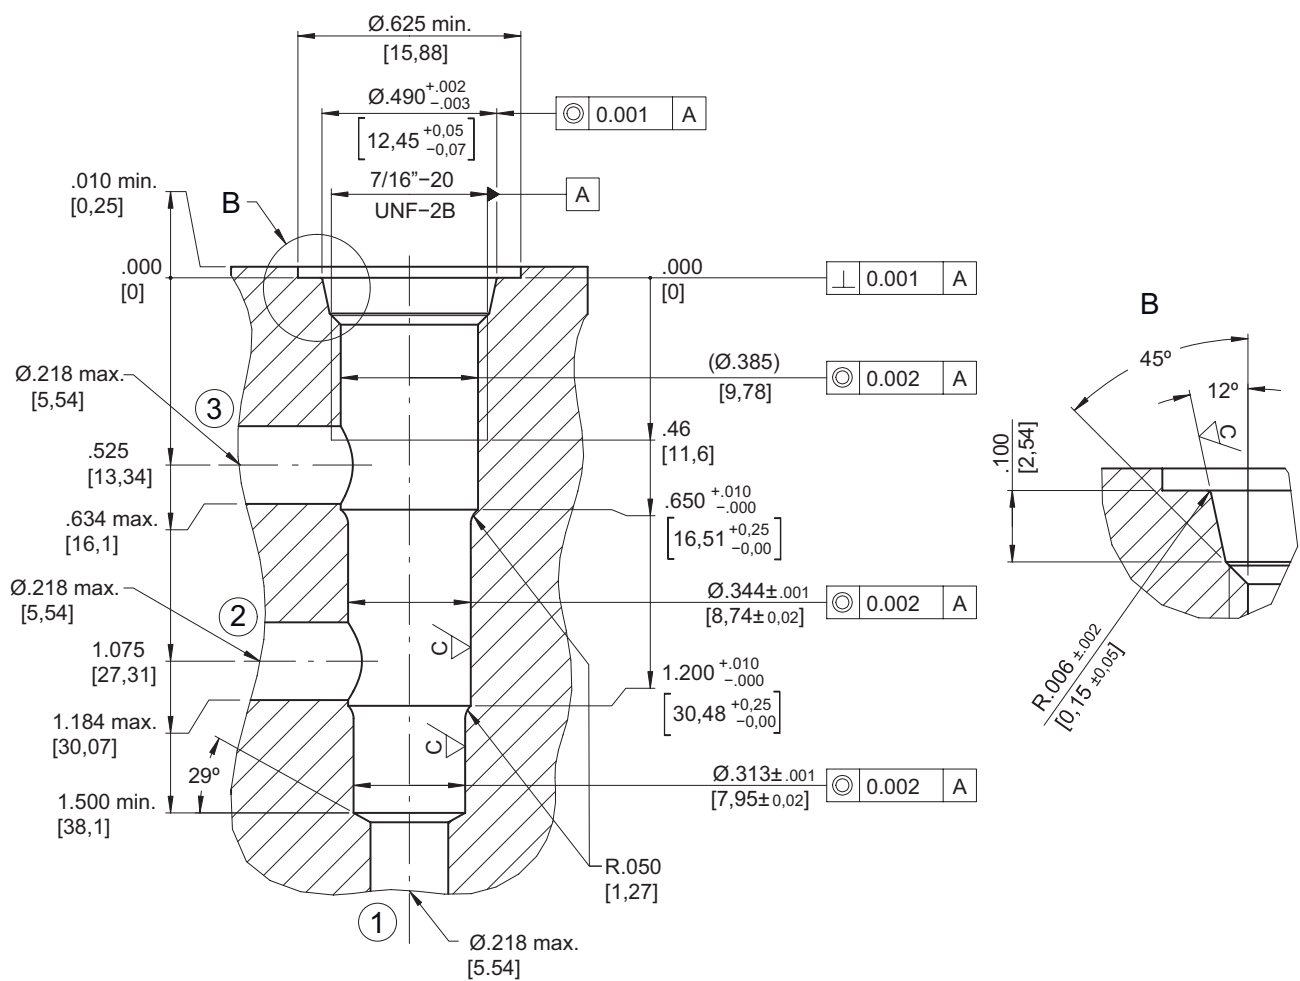

Example dimension unit:
 $.010 = .010''$ inch
 $[0,79] = 0,79 \text{ mm}$ millimeter

Dimension Tolerances

Unless otherwise specified

0.000	$\pm .005''$
0.00	$\pm .010''$
Angles	$\pm 1/2^\circ$

Surface roughness

	$\sqrt{\text{C}}$	$\sqrt{\text{D}}$
Ra	45 μin	125 μin
	(1.15 μm)	(3.2 μm)
	$\sqrt{\text{D}}$	Unless otherwise specified

Installation information



ATTENTION!

You must maintain the specified positional and diametral tolerances. To ensure trouble-free operation of the screw-in cartridges, we strongly recommend that pilot drilling, boring, reaming and cavity thread-cutting are always performed in one setup.



NOTE!

We offer form toolsets for sale or hire. For further information, see data sheet 520-P-000050.