

Proportional 4/2 Throttle Cartridge, Size 5

$Q_{\max} = 30 \text{ l/min}$, $p_{\max} = 250 \text{ bar}$
Sliding-spool design, direct acting
Series MDR42...-5...



- Compact construction for cavity type AN – 3/4-16 UNF
- Dual flow paths for higher flow rate
- Low headloss
- For use with inline or bypass pressure-compensator cartridges
- Reliable operation over the whole pressure and flow range
- With optional manual flow setting
- All exposed parts with zinc-nickel plating
- High pressure wet-armature solenoids
- The slip-on coil can be rotated, and it can be replaced without opening the hydraulic envelope
- Various plug-connector systems and voltages are available


1 Description

Series MDR42... direct acting proportional 4/2 throttle valves are size 5, high performance screw-in cartridges with a 3/4-16 UNF mounting thread. They are designed on the proven sliding-spool principle. The straightforward design delivers an outstanding price/performance ratio. "De-energised closed" and "de-energised open" functions are available. In control mode, the flow through the connections 1 → 3 and 4 → 2 is varied in proportion to the control current. Thanks to these dual flow paths, a higher flow rate is achieved with low headloss. It is essential that ports 1 + 4, and likewise 2 + 3, are joined together in the valve housing (manifold block)


(block). In combination with inline or bypass compensators, these 4/2 throttle cartridges are predominantly used in mobile and industrial applications to allow a flow in hydraulic installations to be controlled electro-proportionally. All external parts of the cartridge are zinc-nickel plated according to DIN EN ISO 19 598 and are thus suitable for use in the harshest operating environments. The slip-on coils can be replaced without opening the hydraulic envelope and can be positioned at any angle through 360°. For self-assembly, please refer to the section related data sheets.

2 Symbol


Dual flow paths



MDR42AD...-E



MDR42AD...



MDR42ANK...



IMPORTANT!

To enable the dual flow-path function, ports 1 + 4 and 2 + 3 must be connected within the valve housing (manifold block).


3 Technical data

General characteristics	Description, value, unit
Designation	proportional 4/2 throttle cartridge
Design	sliding-spool design, direct acting
Mounting method	screw-in cartridge 3/4-16 UNF
Tightening torque	40 Nm \pm 10 %
Size	nominal size 5, cavity type AN
Weight	0.40 kg
Mounting attitude	unrestricted (preferably vertical, coil down)
Ambient temperature range	-30 °C ... +50 °C
Hydraulic characteristics	Description, value, unit
Maximum operating pressure	250 bar
Maximum flow rate	30 l/min
Nominal flow rate 1 + 4 \rightarrow 2 + 3	25 l/min at $\Delta p = 4$ bar
Leakage flow rate	< 400 cm ³ /min (with p_N 250 bar) with oil viscosity 33 mm ² /s (cSt)
Flow direction	see symbols
Hydraulic fluid	HL and HLP mineral oil to DIN 51 524; for other fluids, please contact BUCHER
Hydraulic fluid temperature range	-30 °C ... +70 °C
Viscosity range	15...380 mm ² /s (cSt), recommended 20...130 mm ² /s (cSt)
Minimum fluid cleanliness Cleanliness class to ISO 4406 : 1999	class 18/16/13
Electrical characteristics	Description, value, unit
Supply voltage	12 V DC, 24 V DC
Control current	12 V = 0...1400 mA, 24 V = 0...760 mA
Power consumption at max. control current	max. 19 W
Coil resistance R - cold value at 20 °C - max. warm value	12 V = 5.8 Ω / 24 V = 21 Ω 12 V = 8.6 Ω / 24 V = 32 Ω
Recommended PWM frequency (dither)	200 Hz
Hysteresis with PWM	2...4 % I_N
Reversal error with PWM	2...4 % I_N
Sensitivity with PWM	< 1 % I_N
Reproducibility with PWM	< 2 % p_N
Relative duty cycle	100 %
Protection class to ISO 20 653 / EN 60 529	IP 65 / IP 67 / IP 69K, see "Ordering code" (with appropriate mating connector and proper fitting and sealing)
Electrical connection	DIN EN 175301-803, 3-pin 2 P+E (standard) for other connectors, see "Ordering code"


4 Performance graphs measured with oil viscosity 33 mm²/s (cSt)

For use with compensator (max. $\Delta p = 15$ bar)


$\Delta p = f(Q)$ Pressure drop - Flow rate characteristic

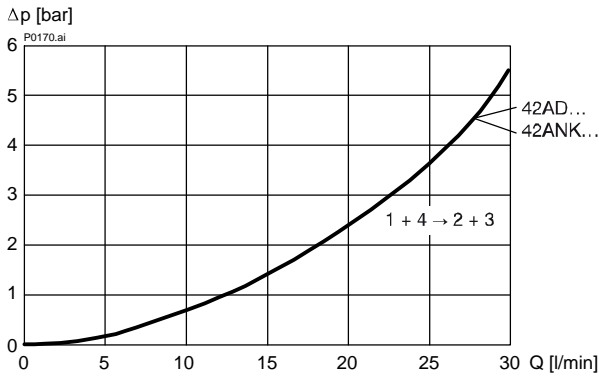


$Q = f(I; \Delta p)$ Flow rate adjustment characteristic

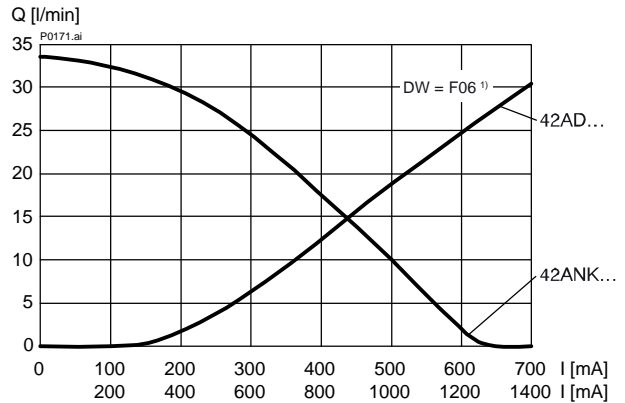

$Q = f(\Delta p; I)$ Flow rate adjustment characteristic
MDR42AD...

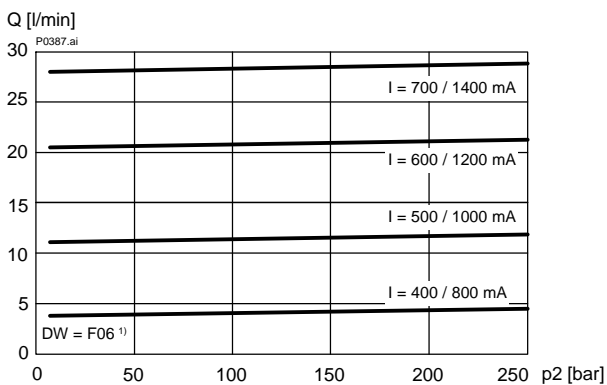

$Q = f(\Delta p; I)$ Flow rate adjustment characteristic
MDR42ANK...

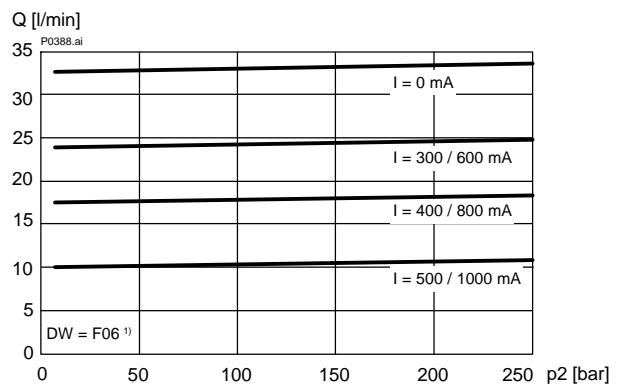

IMPORTANT!

1) Performance graphs measured with compensator model DWDPA-5D-10-F06-2

5 Installation information



IMPORTANT!

To achieve the maximum performance rating, fit the solenoid coil as shown (with the plug pins at the bottom) and install the valve in a steel body. When fitting the cartridges, note the mounting attitude (preferably vertical, with coil down → automatic air bleed) and use the specified tightening torque. No adjustments are necessary, since the cartridges are set in the factory.




ATTENTION!

Only qualified personnel with mechanical skills may carry out any maintenance work. Generally, the only work that should ever be undertaken is to check, and possibly replace, the seals. When changing seals, oil or grease the new seals thoroughly before fitting them.

6 Dimensions & sectional view

Without manual flow setting – standard

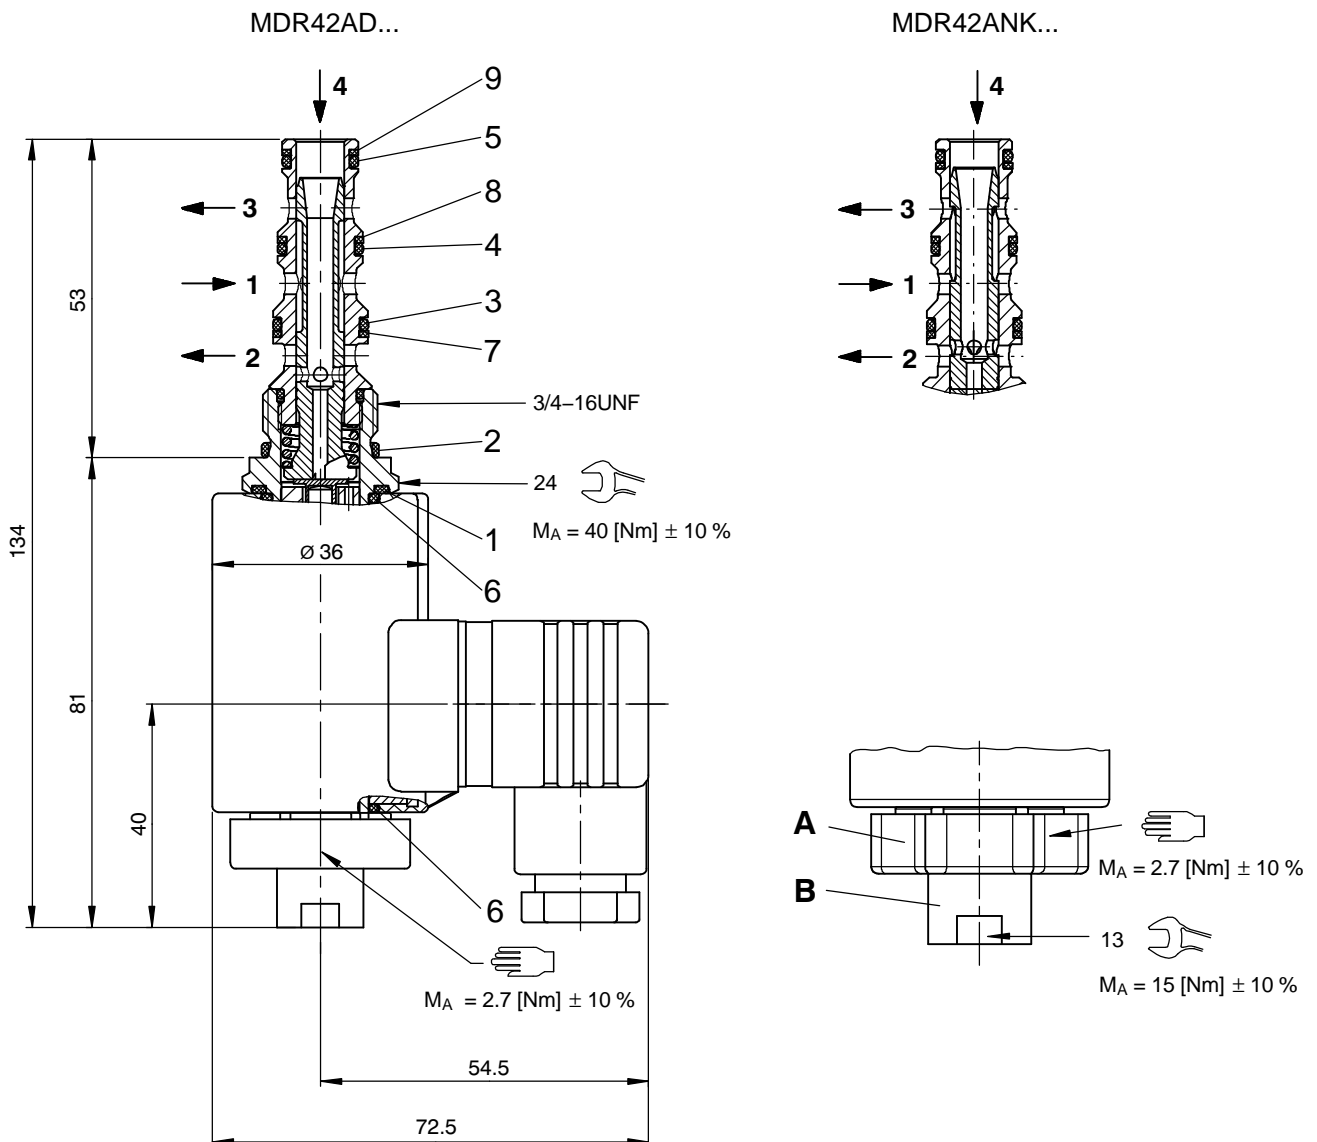

Seal kit no. DS-248-N ²⁾

Item	Qty.	Description
1	1	O-ring \varnothing 18,00 x 2,00 FKM
2	1	O-ring no. 017 \varnothing 17,17 x 1,78 N90
3	1	O-ring no. 014 \varnothing 12,42 x 1,78 N90
4	1	O-ring no. 013 \varnothing 10,82 x 1,78 N90
5	1	O-ring no. 012 \varnothing 09,25 x 1,78 N90
6	2	O-ring \varnothing 16,00 x 2,00 FkM
7	1	Backup ring \varnothing 10,70 x 1,45 x 1,40 FI0751
8	1	Backup ring \varnothing 09,40 x 1,45 x 1,00 FI0751
9	1	Backup ring \varnothing 07,80 x 1,45 x 1,00 FI0751



IMPORTANT!

²⁾ Seal kit with FKM (Viton) seals no. DS-248-V

Air-bleeding


If necessary, air can be purged from these proportional throttle cartridges by using the cap nut (Item B). The procedure is as follows:

- A Knurled nut
- B Cap nut

Steps:

1. Slacken and remove the knurled nut.
2. Slacken the cap nut approx. 1.5 turns.
Caution: Slackening the cap nut allows oil to spray out!
3. Switch the proportional throttle cartridge ON/OFF several times until no more air bubbles escape.
4. Tighten the cap nut.
5. Refit the knurled nut and tighten it.

With manual flow setting – Option “E”

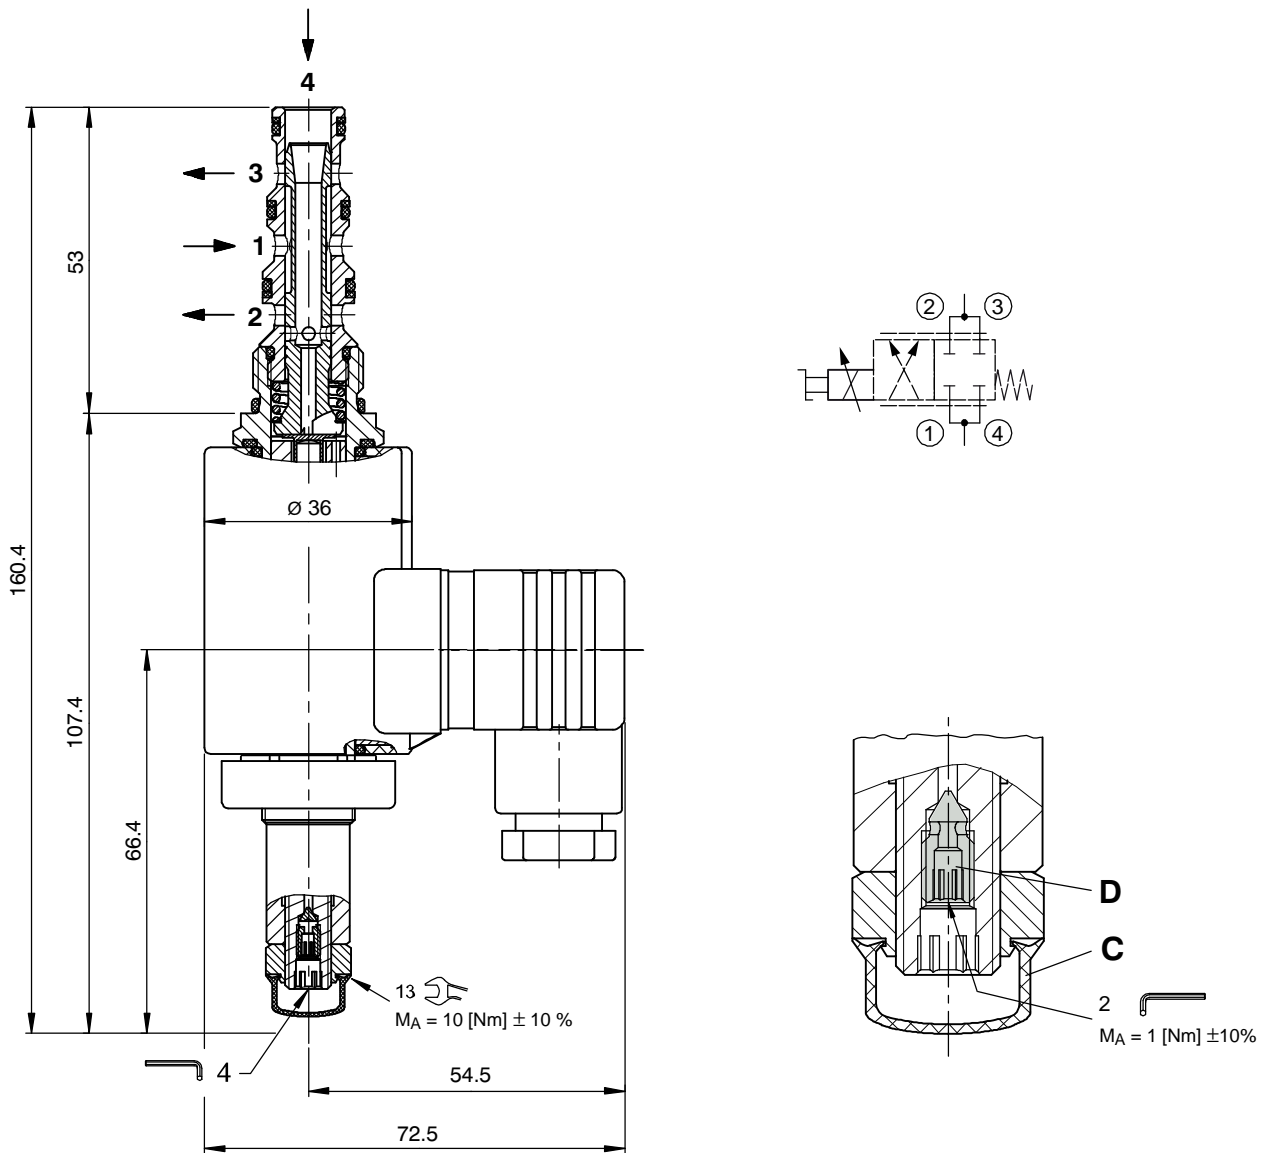

Integral air-bleeding

If necessary, air can be purged from these proportional throttle cartridges by using the integral air-bleed screw (Item D). The procedure is as follows:


- C Protective cap
- D Air-bleed screw

Steps:

1. Remove the protective cap.
2. Slacken the air-bleed screw approx. 2 turns.
3. Switch the proportional throttle cartridge ON/OFF several times until no more air bubbles escape.
4. Tighten the air-bleed screw.
5. Fit the protective cap.

7 Manual flow setting

Optionally, the proportional throttle cartridges can be supplied with an integral manual flow setting. If a proportional solenoid is faulty, for example, this manual flow setting enables the required flow rate to be set mechanically. This manual flow setting is not designed for adjusting the flow in a dynamic control mode.

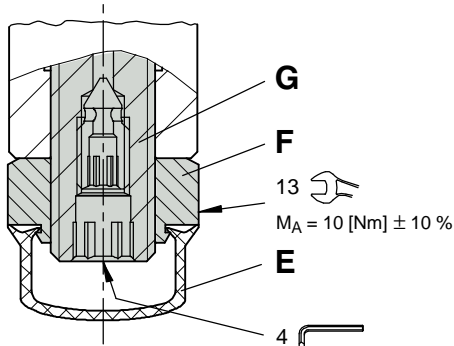

- E Protective cap
- F Lock nut (13 A/F)
- G Adjusting spindle for volume setting

Setting the flow rate manually

Steps:

1. Remove the protective cap.
2. Slacken the lock nut (13 A/F).
3. Screw in (turn to right) the adjusting spindle (4 A/F) until the required flow rate is set.
4. Tighten the lock nut (13 A/F).
5. Fit the protective cap.



Restoring the factory settings

Steps:

1. Solenoid de-energised.
2. Remove the protective cap.
3. Slacken the lock nut (13 A/F).
4. Unscrew the adjusting spindle (4 A/F) to its end-stop, then screw it in 2 1/8 turns.
5. Tighten the lock nut (13 A/F).
6. Fit the protective cap.

8 Application examples

Used with bypass pressure-compensator cartridge

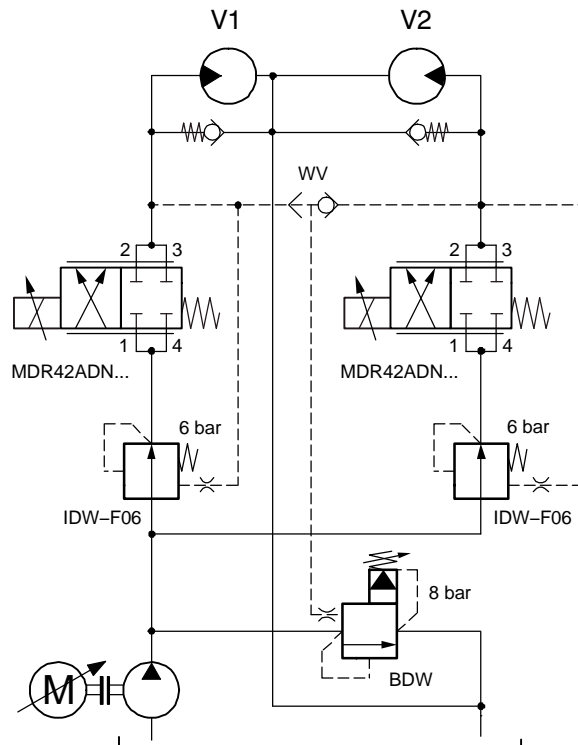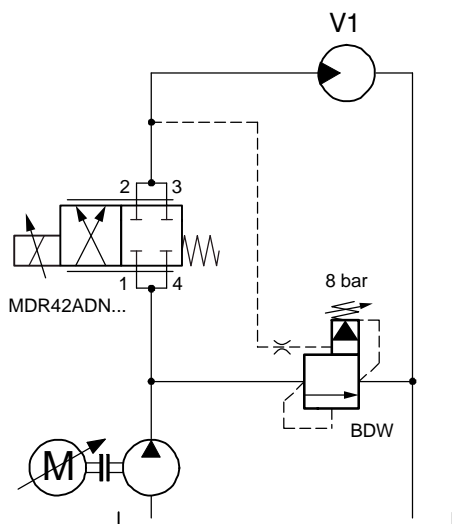

Classic combination with inline and bypass pressure-compensator cartridges

9 Ordering code

Ex.

M	D	R	42AD	N	A	5	_	-	_	-	1	24	D	_
---	---	---	------	---	---	---	---	---	---	---	---	----	---	---

- M = flow-control valve
- D = direct acting
- R = proportional solenoid
- 42AD = 4/2 function (de-energised closed)
- 42ANK = 4/2 function (de-energised open)
- N = electrically operated, V DC = 27 W
- A ... Q = type only for use with compensator (standard)
- Z ... R = special features - please consult BUCHER
- 5 = nominal size 5
- (blank) = NBR (Nitrile) seals (standard)
- V = FKM (Viton) seals (special seals - please contact BUCHER)
- (blank) = no manual flow setting (standard)
- E = with manual flow setting
- 1 ... 9 = design stage (omit when ordering new units)
- ... = voltage e.g. 24 (24 V)
- D = current DC
- (blank) = DIN EN 175301-803 connection with mating plug (standard, IP 65)
- M100 = DIN EN 175301-803 connection without mating plug

C = Kostal plug connection (IP 65)	} mating plug not supplied
JT = Junior Timer radial plug connection (with protection diode, IP65)	
IT = Junior Timer axial plug connection (with protection diode, IP65)	
D = Deutsch plug connection 45° DT04-2P (IP67/69K)	
DT = Deutsch plug connection 45° DT04-2P (with protection diode, IP67/69K)	
S = AMP Superseal 1.5 (IP67) / Metri-Pack 150 (IP65) plug connection	
F = flying leads (500 mm)	

10 Related data sheets

Reference	(Old no.)	Description
400-P-040011	(i-32)	The form-tool hire programme
400-P-040181	(i-33.12)	Cavity type AN
400-P-120110	(W-2.141)	Coils for screw-in cartridge valves series D36
400-P-510101		Amplifier unit for proportional valves (1-channel) PBS - 3A

info.ch@bucherhydraulics.com

www.bucherhydraulics.com

© 2024 by Bucher Hydraulics AG Frutigen, CH-3714 Frutigen

All rights reserved.

Data is provided for the purpose of product description only, and must not be construed as warranted characteristics in the legal sense. The information does not relieve users from the duty of conducting their own evaluations and tests. Because the products are subject to continual improvement, we reserve the right to amend the product specifications contained in this catalogue.

Classification: 430.310.325.305.310.310