

Pressure valve Relief function

$Q_{\max} = 31 \text{ gpm}$, $p_{\max} = 4300 \text{ psi}$

pilot operated, spool type, proportional solenoid with emergency override

Type series: DBVSA-1CG...




- Screw-in cartridge valve
- For cavity DC
- All external parts with zinc-nickel plating according to DIN EN ISO 19598
- Installation in threaded port body type DC-12
- Damped design
- Seated pilot stage
- Fail-safe function
- Excellent stability over the whole pressure and flow range
- High pressure wet-armature solenoids
- The slip-on coil can be rotated, and it can be replaced without opening the hydraulic envelope
- Various plug-connector systems and voltages are available

Description

The invers proportional pressure-relief valves, series DBVS-1CG..., are size 10, pilot-operated, high performance screw-in valves with a M24x1.5 mounting thread. They consist of a spool-type main stage and a leak-free, poppet-type pilot stage with a falling pressure/current characteristic. Thanks to the damping of the solenoid armature, these pressure-relief cartridges exhibit excellent stability over the whole pressure and flow range. With these proportional pressure-relief cartridges, the relief pressure is dependent on the electrical control current and can be continuously varied. When the solenoid is de-energised (initial position), the relief pressure is the nominal pressure of the applicable spring range (fail-safe function). Any pressure at port B is additive to the valve setting at port A, therefore port B should preferably be connected directly to tank. In control mode,

the relief pressure is inversely proportional to the change in the required value (amplifier output current). To obtain a reliable pressure setting over the entire pressure range, the overall pressure range is divided into different pressure levels. If a proportional solenoid is faulty, for example, the integral manual pressure setting enables the required pressure to be set mechanically. These valves are mainly used in certain mobile and industrial applications to limit the system pressure. The setting is by means of an adjusting spindle. The slip-on coils can be replaced without opening the hydraulic envelope and can be positioned at any angle through 360°. All external parts of the screw-in valves are zinc-nickel plated and are thus suitable for use in the harshest operating environments. For installation and further information, please refer to the section related data sheets.

Symbol

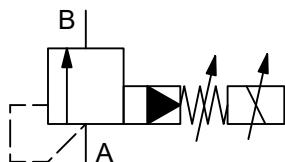

Technical data

| General characteristics | Description, value, unit |
|------------------------------|---|
| Function group | Pressure valve |
| Function | Relief function |
| Design | Screw-in cartridge valve |
| Controls | proportional solenoid with emergency override |
| Characteristic | pilot operated, spool type |
| Construction size | NG 10 |
| Thread size | M24x1,5 |
| Mounting attitude | unrestricted (preferably vertical, coil down) |
| Weight | 1.21 lb |
| Cavity acc. factory standard | For cavity DC |
| Tightening torque steel | 48 ft·lb |
| Tightening torque aluminium | 37 ft·lb |
| Tightening torque tolerance | ± 10 % |
| Minimum ambient temperature | - 22 °F |
| Maximum ambient temperature | + 122 °F |
| Surface protection | All external parts with zinc-nickel plating according to DIN EN ISO 19598 |
| Sealing material | see ordering code |
| Seal kit order number | NBR: DS-284-N / FKM: DS-284-V |

| Hydraulic characteristics | Description, value, unit |
|---|--|
| Maximum operating pressure | 4300 psi |
| Restriction of the operating pressure | 250 ¹⁾ |
| Maximum flow rate | 31 gpm |
| Flow direction | see symbol |
| Hydraulic fluid | HL and HLP mineral oil according to DIN 51 524; other fluids on request! |
| Minimum fluid temperature | - 22 °F |
| Maximum fluid temperature | + 158 °F |
| Viscosity range | 15 ... 380 mm ² /s (cSt) |
| Recommended viscosity range | 20 ... 130 mm ² /s (cSt) |
| Minimum fluid cleanliness (cleanliness class according to ISO 4406:1999) | class 18/16/13 |

| Hydraulic characteristics | Description, value, unit |
|----------------------------|--|
| Opening pressure | ...700 / ...900 / ...1400 / ...2300 / ...3300 / ...4300 psi |
| Internal leakage flow rate | pressure range 050: ...0.03 gpm pressure range 063: ...0.03 gpm pressure range 100: ...0.035 gpm pressure range 160: ...0.045 gpm pressure range 230: ...0.07 gpm pressure range 300: ...0.08 gpm |



ATTENTION!


If there is pressure at the secondary connection, this is added to the set pressure value.

| Electric characteristics | Description, value, unit |
|--|---|
| Actuator type | solenoid coil |
| Solenoid coils type | D36 |
| Supply voltage DC | 12/24 V DC |
| Supply voltage tolerance | ± 10 % |
| Control current | 12 V = 0...1400 mA / 24 V = 0...760 mA |
| Nominal power consumption | 19 W |
| Relative duty cycle | 100 % |
| Coil resistance R | Cold value at 68°F 12 V = 5.8 Ω 24 V = 21 Ω max. warm value 12 V = 8.6 Ω 24 V = 32 Ω |
| Recommended PWM frequency | 200 Hz |
| Response sensitivity with PWM | < 1 % IN |
| Reproducibility with PWM | < 2 % pN |
| Hysteresis with PWM | 2...4 % IN |
| Reversal error with PWM | 2...4 % IN |
| Electrical connection coil | DIN EN 175301-803, 3-pole 2 P+E (IP 65) |
| Protection class solenoid coil to ISO 20 653 / EN 60 529 | IP 65 / IP 67 / IP 69K, see "Ordering code" (with appropriate mating connector and proper fitting and sealing) |

Performance graphs


measured with oil viscosity 33.0 mm²/s (cSt)

$p = f(I)$ Pressure adjustment

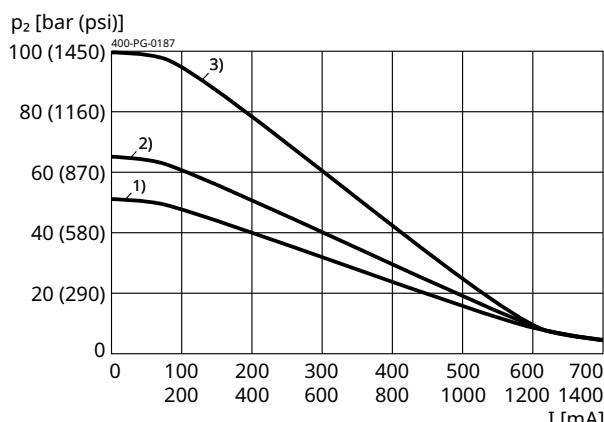


1) $p_n = 50$ bar (725 psi)
2) $p_n = 63$ bar (915 psi)
3) $p_n = 100$ bar (1450 psi)

$p = f(I)$ Pressure adjustment

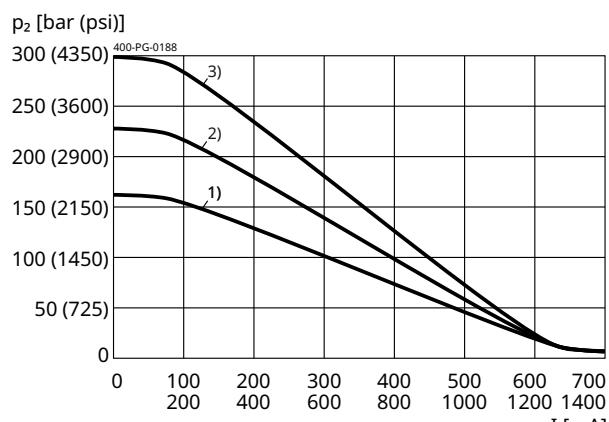


1) $p_n = 160$ bar (2300 psi)
2) $p_n = 230$ bar (3350 psi)
3) $p_n = 300$ bar (4350 psi)

$p = f(Q)$ Pressure-flow rate

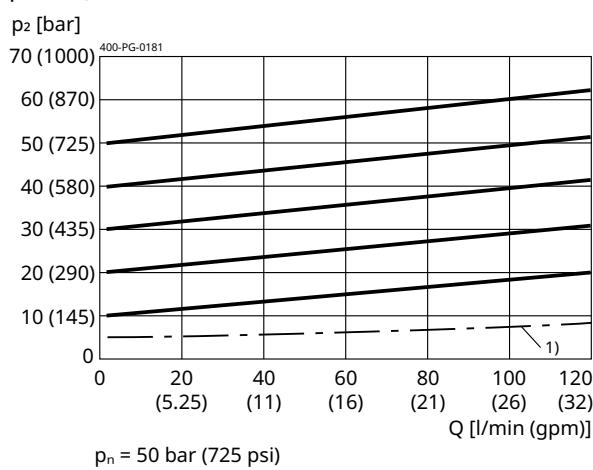


$p_n = 50$ bar (725 psi)
1) = Application limit (p min. / I = max. mA)

$p = f(Q)$ Pressure-flow rate

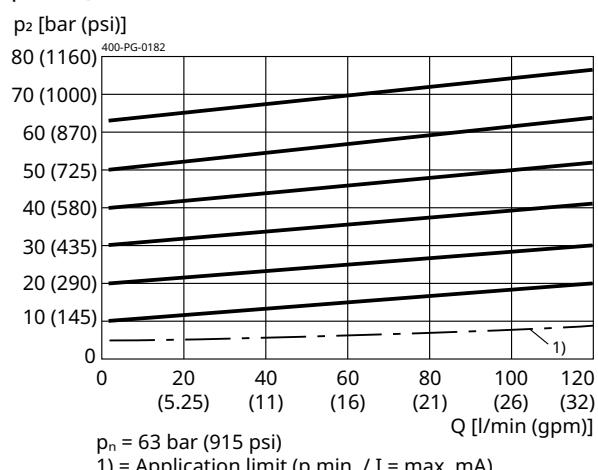


$p_n = 63$ bar (915 psi)
1) = Application limit (p min. / I = max. mA)

$p = f(Q)$ Pressure-flow rate

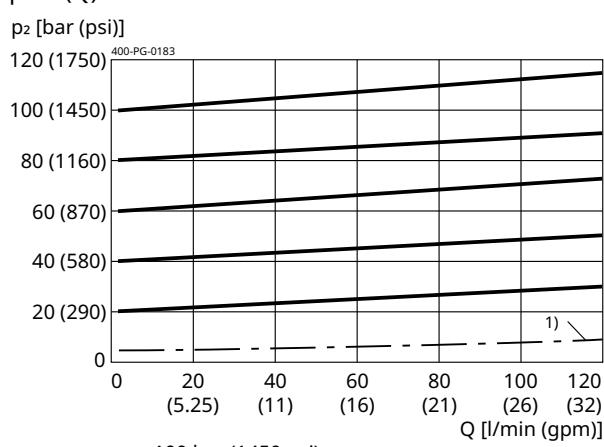


$p_n = 100$ bar (1450 psi)
1) = Application limit (p min. / I = max. mA)

$p = f(Q)$ Pressure-flow rate

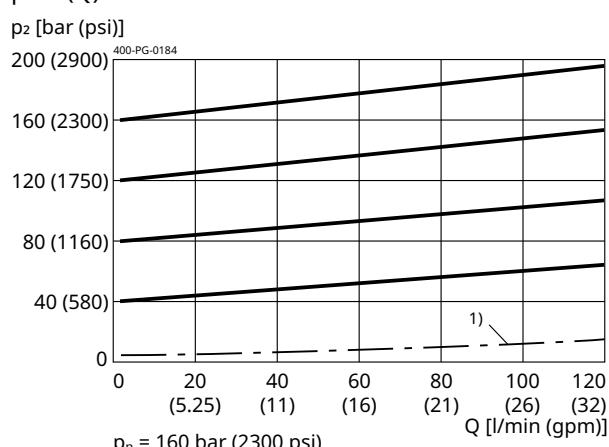

$p_n = 160$ bar (2300 psi)
1) = Application limit (p min. / I = max. mA)


$p = f(Q)$ Pressure-flow rate

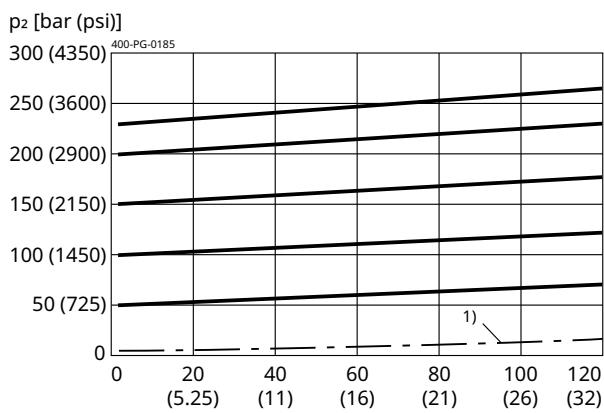

$p_n = 230$ bar (3350 psi)

1) = Application limit (p min. / I = max. mA)

$p = f(Q)$ Pressure-flow rate

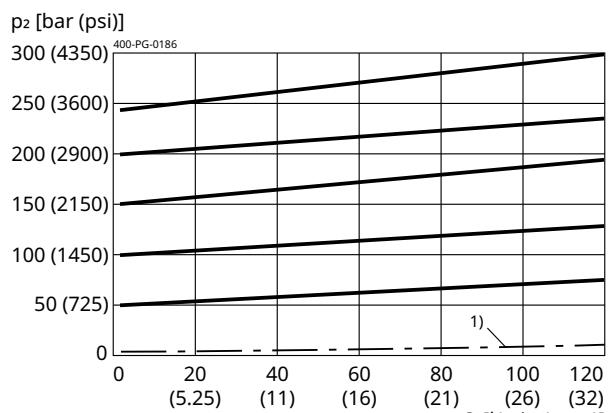


$p_n = 300$ bar (4350 psi)

1) = Application limit (p min. / I = max. mA)

Dimensions and sectional view

Beispiel für die Masseinheit:
Exampel for the dimensional units:
0.79 = 0.79 mm millimeter
(.031) = 0.031" inch

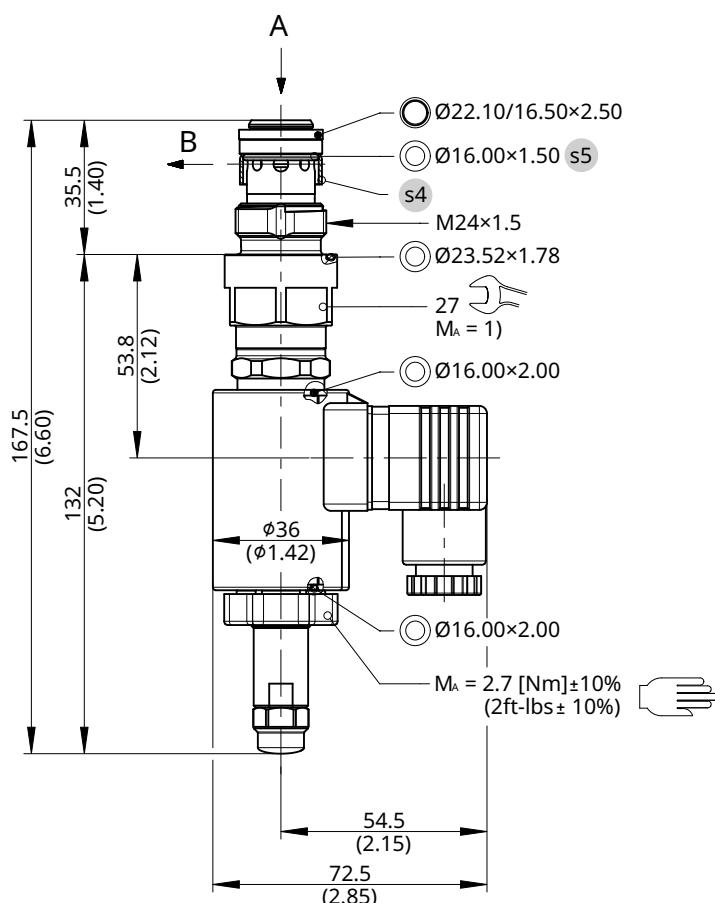

Installation information

NOTE!

1) When fitting the screw-in cartridge valve, use the specified tightening torque. The value can be found in the chapter "Technical data".

NOTE!

To achieve the screw-in valve's maximum performance rating, fit the solenoid coil as shown (with the plug pins nearest the valve body). The valve must be installed in a steel body.

NOTE!

The seals are not available individually. The seal kit order number can be found in the chapter "Technical data".

NOTE!

For installation in an aluminium housing, we recommend using the "S" version. This is equipped with a steel ring ^{s4} and plastic ring ^{s5} to protect the housing from possible damage.

NOTE!

To ensure proper function, the valve should be air-bled before commissioning. Refer to chapter "Air-bleeding before commissioning"



ATTENTION!

Only qualified personnel with mechanical skills may carry out any maintenance work. Generally, the only work that should ever be undertaken is to check, and possibly replace, the seals. When changing seals, oil or grease the new seals thoroughly before fitting them.

Manual pressure setting


These inverse proportional pressure-relief cartridges are equipped as standard with an integral manual pressure setting. If a proportional solenoid is faulty, for example, this manual pressure setting enables the required pressure to be set mechanically. The manual pressure setting can also be used to make minor pressure adjustments directly at the system.

① Note!

Any changes to the manual pressure setting have a direct effect on the factory settings.

1. Remove the protective cap ① .
2. Loosen the lock nut ② .
3. Unscrew (turn to left) the adjusting spindle ③ until the required pressure is set.

4. Tighten the lock nut ② to the specified torque.
5. Fit the protective cap ① .

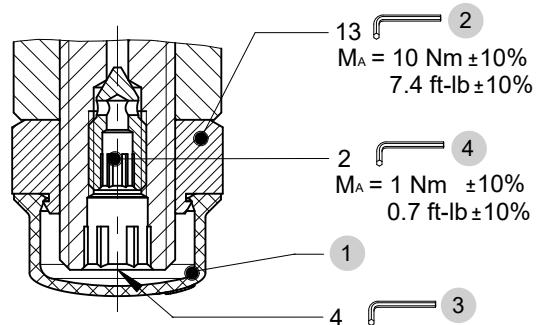


Reset to factory settings

To reset the proportional pressure-relief cartridges to their initial position (the factory setting), a constant flow rate and a pressure gauge that measures the pressure in the main port A are needed. The pressure setting must not exceed the nominal pressure of the spring range in use. The procedure is as follows:

1. Ensure that the solenoid coil is de-energized.
2. Remove the protective cap ① .
3. Loosen the lock nut ② .
4. Unscrew the adjusting spindle ③ to its end-stop.
5. screw in the adjusting spindle ③ until the pressure on the gauge reaches the nominal pressure (pN) of the spring range in use.

6. Tighten the lock nut ② to the specified torque.

7. Fit the protective cap ① .

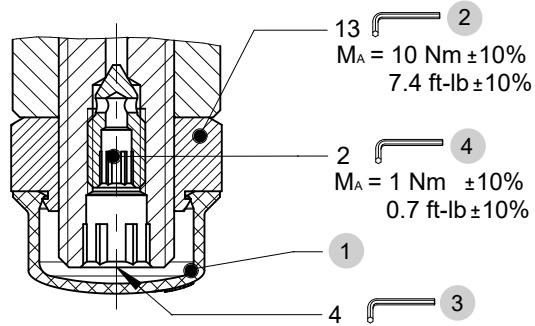


Air-bleeding

If necessary, air can be purged from these proportional pressure-reducing cartridges by using the integral air-bleed screw. If the cartridge is mounted as preferred (solenoid coil hanging), the valve behaves as self-venting. To vent the valve, follow these steps:


1. Remove the protective cap ① .
2. Loosen the air-bleed screw ④ approx. 2 turns.
3. Switch the pressure-relief cartridge ON/OFF several times until no more air bubbles escape.
4. Tighten the air-bleed screw ④ to the specified torque.

5. Fit the protective cap ① .

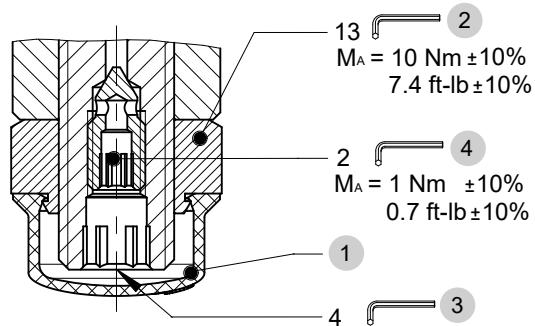

Application example

The application example shows a reversible fan drive.

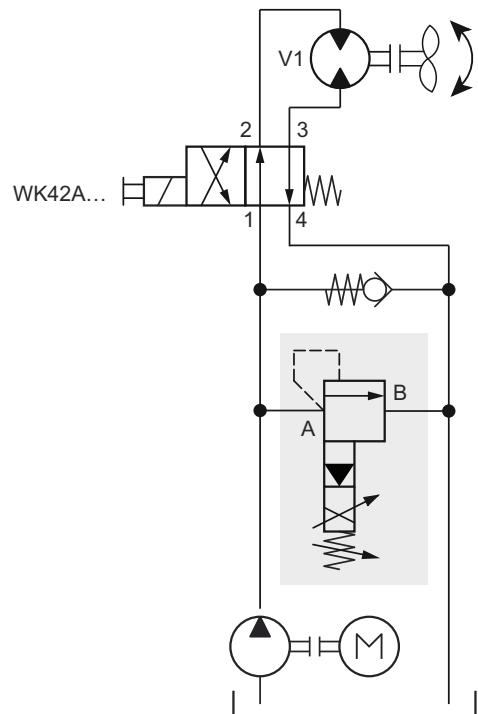

Ordering code

| | | | | | | | | | | | |
|---------|---|--|-------------|------------------|-----|---|--------|---|---|--------|---|
| Ex. | D B V S A _ | - | 1 C G | - | 300 | - | 10 _ | - | 3 | 24 D | _ |
| D | = pressure-control valve | | | | | | | | | | |
| B | = pressure relief valve | | | | | | | | | | |
| V | = pilot operated | | | | | | | | | | |
| S | = electrically operated, D36, 8 W, proportional | | | | | | | | | | |
| A ... Q | = standard model according to valid data sheet | | | | | | | | | | |
| Z ... R | = special model (on request) | | | | | | | | | | |
| (blank) | = without steel ring (for use in steel housing) | | | | | | | | | | |
| S | = with steel ring (for use in aluminium housing) | | | | | | | | | | |
| 1 | = pressure relief with internal spring space relief | | | | | | | | | | |
| C | = cavity type DC | | | | | | | | | | |
| G | = proportional solenoid, inverse type (pulling) | | | | | | | | | | |
| 050 | = pressure range ...50 bar / ...725 psi | | | | | | | | | | |
| 063 | = pressure range ...63 bar / ...915 psi | | | | | | | | | | |
| 100 | = pressure range ...100 bar / ...1450 psi | | | | | | | | | | |
| 160 | = pressure range ...160 bar / ...2300 psi | | | | | | | | | | |
| 230 | = pressure range ...230 bar / ...3350 psi | | | | | | | | | | |
| 300 | = pressure range ...300 bar / ...4350 psi | | | | | | | | | | |
| 10 | = nominal size 10 | | | | | | | | | | |
| (blank) | = NBR (nitril-butadien-rubber / BUNA) seals (standard) | | | | | | | | | | |
| V | = FKM (fluorocarbon rubber / VITON) seals (special seals on request) | | | | | | | | | | |
| 1 ... 9 | = technical design no. (omit by ordering) | | | | | | | | | | |
| ... | = voltage e.g. 24 (24 V) | | | | | | | | | | |
| D | = current DC | | | | | | | | | | |
| (blank) | = DIN EN 175301-803 connection | 3-pole 2 P+E (standard) | (IP 65) | with mating plug | | | | | | | |
| T | = DIN EN 175301-803 connection | 3-pole 2 P+E, with protection diode | (IP 65) | with mating plug | | | | | | | |
| M100 | = DIN EN 175301-803 connection | 3-pole 2 P+E | (IP 65) | | | | | | | | |
| J | = Junior Timer plug connection | 2-pole radial | (IP 65) | | | | | | | | |
| JT | = Junior Timer plug connection | 2-pole radial, with protection diode | (IP 65) | | | | | | | | |
| I | = Junior Timer plug connection | 2-pole axial | (IP 65) | | | | | | | | |
| IT | = Junior Timer plug connection | 2-pole axial, with protection diode | (IP 65) | | | | | | | | |
| D | = Deutsch plug connection DT04-2P | 2-pole 45° | (IP 67/69K) | | | | | | | | |
| DT | = Deutsch plug connection DT04-2P | 2-pole 45°, with protection diode other plug-variants, please consult BUCHER. | (IP 67/69K) | | | | | | | | |

IMPORTANT!

Not every combination of voltage values, current type and plug connections available.

Related data sheets

| Reference | Description |
|--------------|--------------------------|
| 400-P-040011 | Form tools |
| 400-P-060111 | Cavity DC |
| 400-P-120110 | Solenoid coil D36 |
| 400-P-740101 | Threaded port body DC-12 |

info.ch@bucherhydraulics.com

www.bucherhydraulics.com

© 2026 by Bucher Hydraulics AG Frutigen, 3714 Frutigen, Switzerland

All rights reserved.

Data is provided for the purpose of product description only, and must not be construed as warranted characteristics in the legal sense. The information does not relieve users from the duty of conducting their own evaluations and tests. Because the products are subject to continual improvement, we reserve the right to amend the product specifications contained in this catalogue.