

# Pressure valve Relief function

$Q_{\max} = 8 \text{ gpm}$ ,  $p_{\max} = 6000 \text{ psi}$

direct acting, poppet type, mechanically adjustable

Type series: DDPC-1L-4-...




- Screw-in cartridge valve
- For cavity AL
- All external parts with zinc-nickel plating according to DIN EN ISO 19598
- Installation in threaded port body type GALA
- High flow rates
- Compact construction
- High-pressure damping ensures very stable operation
- Suitable for use as anti-shock valve

## Description

The pressure relief valves, series DDP-1L-..., are size 4, direct acting, screw-in cartridge valves with a 3/4-16 UNF mounting thread. The poppet seat design ensures that the valves are leak-tight. The straightforward design delivers an outstanding price/perform-ance ratio and good pressure/flow ratings. To obtain a reliable pressure setting over the entire pressure range, the overall pressure range is divided into different pressure levels. Each pressure range corresponds to a particular spring that allows a certain

maximum operating pressure to be set. The pressure is set by means of an adjusting spindle. All external parts of the screw-in valves are zinc-nickel plated and are thus suitable for use in the harshest operating environments. These valves are mainly used in certain mobile and industrial applications to limit the system pressure. Please note that any tank or return-line pressures are additive to the setting. For self-assembly, please refer to the section related data sheets.

## Symbol



Technical data

General characteristics	Description, value, unit
Function group	Pressure valve
Function	Relief function
Design	Screw-in cartridge valve
Controls	mechanically adjustable
Characteristic	direct acting, poppet type
Construction size	NG 4
Thread size	3/4-16 UNF-2A
Mounting attitude	unrestricted
Weight	0.42 lb
Cavity acc. factory standard	For cavity AL
Tightening torque steel	37 ft·lb
Tightening torque aluminium	37 ft·lb
Tightening torque tolerance	± 10 %
Minimum ambient temperature	- 22 °F
Maximum ambient temperature	+ 176 °F
Surface protection	All external parts with zinc-nickel plating according to DIN EN ISO 19598
Sealing material	see ordering code
Seal kit order number	NBR: DS-350-N / FKM: DS-350-V

Hydraulic characteristics	Description, value, unit
Maximum operating pressure	6000 psi
Restriction of the operating pressure	port 1: max. 3600 psi <sup>1)</sup>
Maximum flow rate	8 gpm
Flow direction	see symbol
Hydraulic fluid	HL and HLP mineral oil according to DIN 51 524; other fluids on request!
Minimum fluid temperature	- 22 °F
Maximum fluid temperature	+ 176 °F
Viscosity range	10 ... 650 mm <sup>2</sup> /s (cSt)
Recommended viscosity range	15 ... 250 mm <sup>2</sup> /s (cSt)
Minimum fluid cleanliness (cleanliness class according to ISO 4406:1999)	class 20/18/15
Opening pressure	290 / 580 / 1450 / 2300 / 3600 / 5000 / 6000 psi
Minimum set pressure	70 psi
Maximum set pressure	6000 psi
Pressure adjustment range	pressure range 02: 1 turn = approx. 60 psi pressure range 04: 1 turn = approx. 115 psi pressure range 10: 1 turn = approx. 300 psi pressure range 16: 1 turn = approx. 465 psi pressure range 25: 1 turn = approx. 740 psi pressure range 35: 1 turn = approx. 1000 psi pressure range 42: 1 turn = approx. 1160 psi


**NOTE!**

1) Please note that any tank or return-line pressures acting at port 1 are additive to the pressure setting at port 2.


## Performance graphs

measured with oil viscosity 33.0 mm<sup>2</sup>/s (cSt)


$\Delta p = f(Q)$  Pressure drop-flow rate characteristic

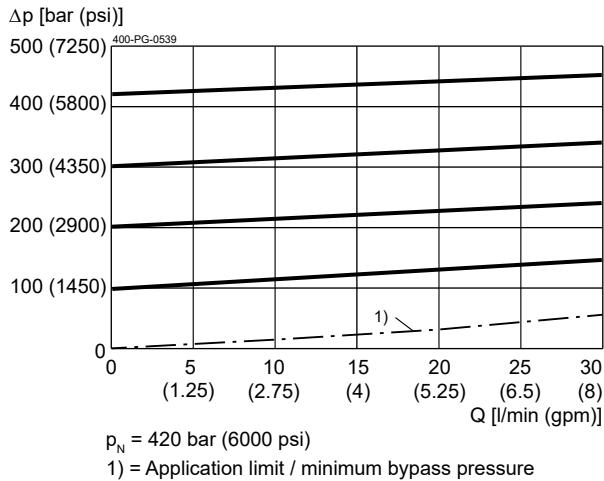


$\Delta p = f(Q)$  Pressure drop-flow rate characteristic

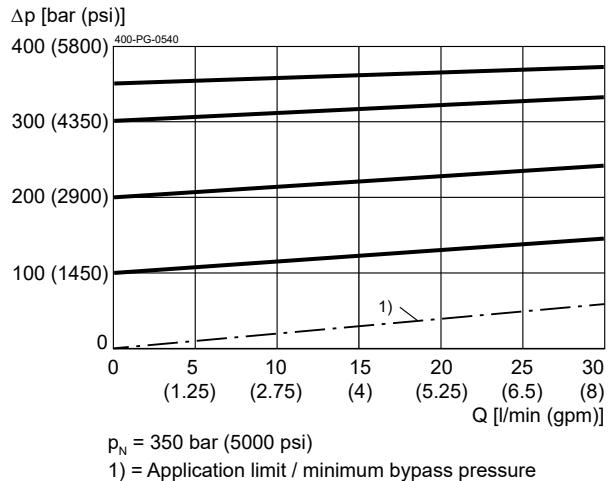


$\Delta p = f(Q)$  Pressure drop-flow rate characteristic

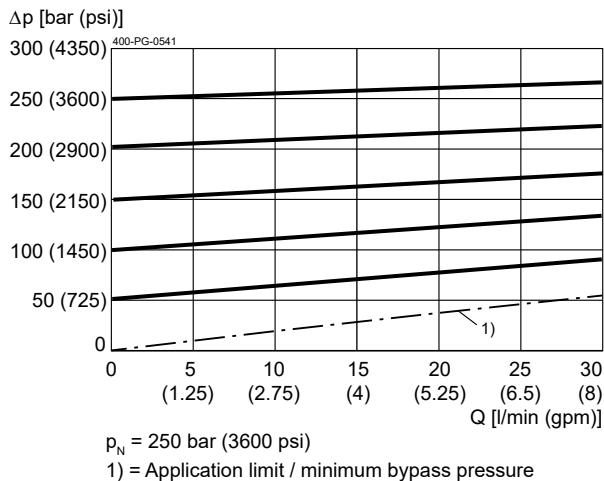


$\Delta p = f(Q)$  Pressure drop-flow rate characteristic

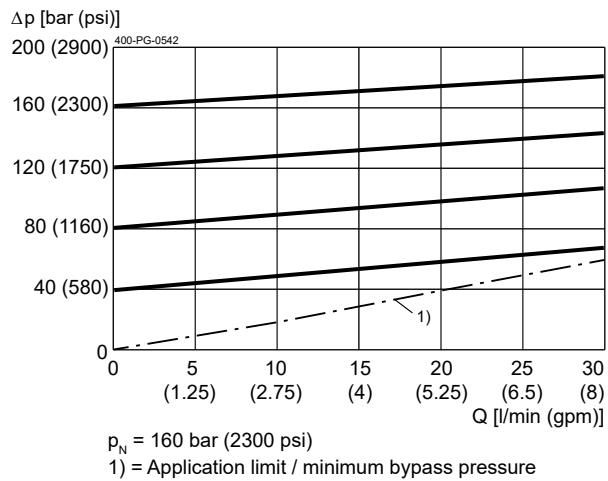


$\Delta p = f(Q)$  Pressure drop-flow rate characteristic

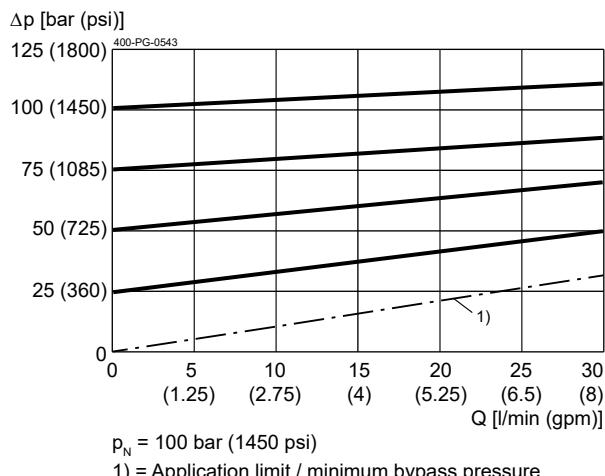

$\Delta p = f(Q)$  Pressure drop-flow rate characteristic

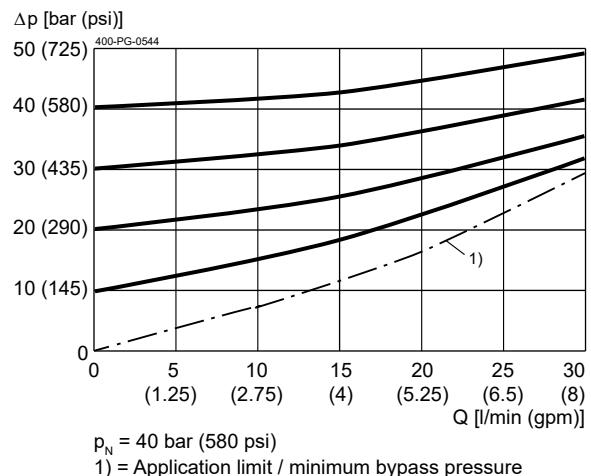


$\Delta p = f(Q)$  Pressure drop-flow rate characteristic

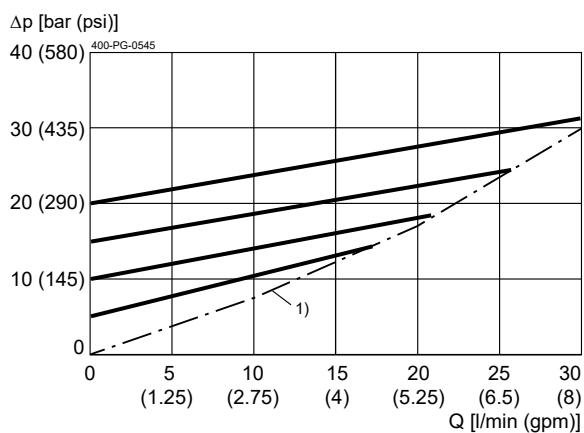


## Dimensions and sectional view

Beispiel für die Maßeinheit:  
Example for the dimensional units:  
0.79 = 0.79 mm millimeter  
(.031) = 0.031" inch


Version "S": Einstellschraube (Standard)  
Version "S": adjustment screw (standard)

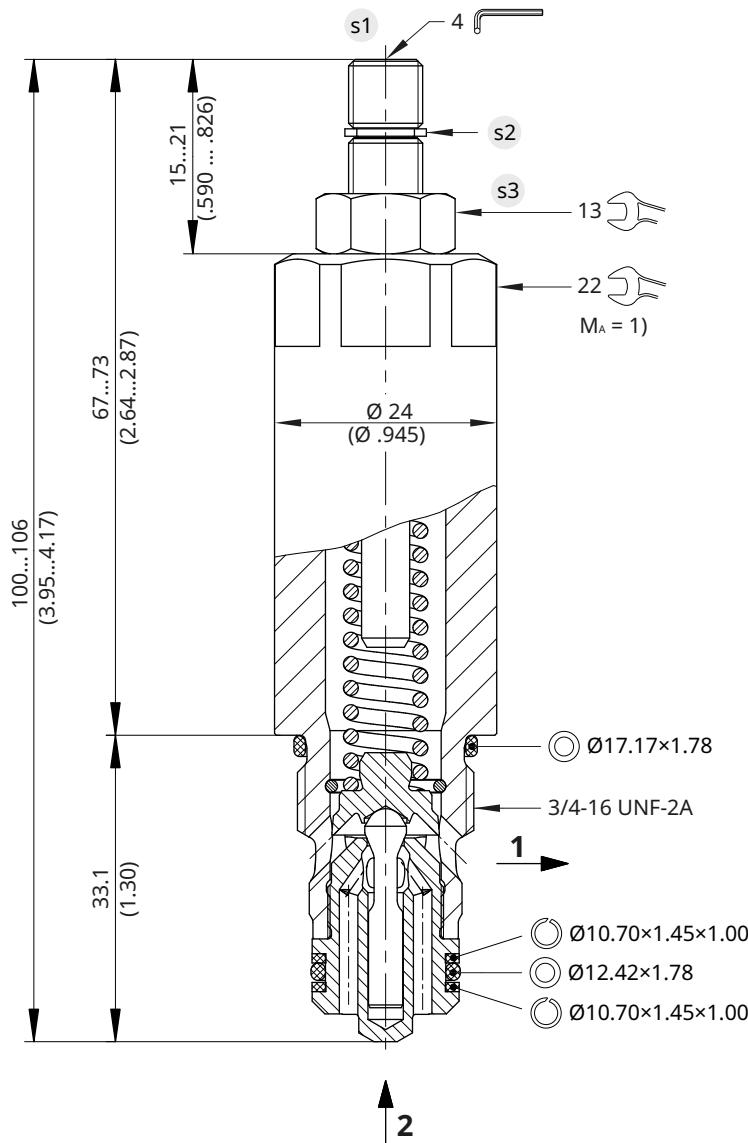

Version "H": Einstellschraube mit Handrad  
Version "H": adjustment screw with handknob

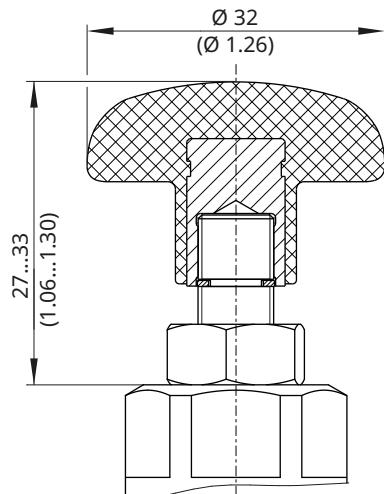

Einstellschraube mit Sicherungskappe  
adjustment screw with tamper-proof cap

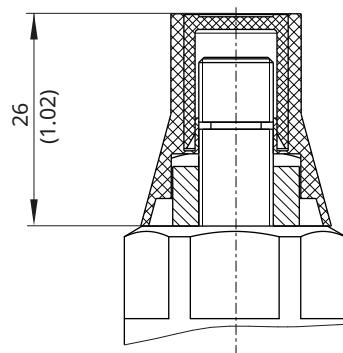

## Installation information



### ATTENTION!

Only qualified personnel with mechanical skills may carry out any maintenance work. Generally, the only work that should ever be undertaken is to check, and possibly replace, the seals. When changing seals, oil or grease the new seals thoroughly before fitting them.



### NOTE!

Set the required pressure with the adjusting screw **s1**. After you have set the valve, lock the adjusting screw **s1** with the lock nut.



### NOTE!

1) When fitting the screw-in cartridge valve, use the specified tightening torque. The value can be found in the chapter "Technical data".



**NOTE!**

Valve settings can be sealed by fitting the tamper-proof cap. To fit the cap, the snap ring  has to be removed. Subsequent adjustment is only possible by destroying the tamper-proof cap.



**NOTE!**

The seals are not available individually. The seal kit order number can be found in the chapter "Technical data".

## Ordering code

Ex. **D D P C - 1 L - 4 - 02 - S N - 2**

**D** = pressure valve

**D** = relief-function, direct acting

**P** = cartridge design

**A ... Q** = standard model according to valid data sheet

**Z ... R** = special model (on request)

**1** = pressure relief with internal spring space relief

**L** = cavity type AL

**4** = nominal size 4

**02** = pressure range 5 ... 20 bar / 70...290 psi

**04** = pressure range 10 ... 40 bar / 145...580 psi

**10** = pressure range 25...100 bar / 360...1450 psi

**16** = pressure range 40...160 bar / 580...2300 psi

**25** = pressure range 50...250 bar / 725...3600 psi

**35** = pressure range 100...350 bar / 1450...5000 psi

**42** = pressure range 100...420 bar / 1450...6000 psi

**S** = adjustment screw with internal hexagon (**standard**)

**H** = adjustment screw with hand knob

**N** = NBR (nitril-butadien-rubber / BUNA) seals (**standard**)

**V** = FKM (fluorocarbon rubber / VITON) seals  
(special seals on request)

**1...9** = technical design no. (omit by ordering)



**NOTE!**

When required the tamper-proof cap (seal) for the adjustment screw must be ordered separately in plain language.

## Related data sheets

Reference	Description
400-P-040011	Form tools
400-P-040171	Cavity AL
400-P-720101	Threaded port body GALA

[info.ch@bucherhydraulics.com](mailto:info.ch@bucherhydraulics.com)

[www.bucherhydraulics.com](http://www.bucherhydraulics.com)

© 2026 by Bucher Hydraulics AG Frutigen, 3714 Frutigen, Switzerland

All rights reserved.

Data is provided for the purpose of product description only, and must not be construed as warranted characteristics in the legal sense. The information does not relieve users from the duty of conducting their own evaluations and tests. Because the products are subject to continual improvement, we reserve the right to amend the product specifications contained in this catalogue.