

Pressure valve Reducing function

$Q_{\max} = 31 \text{ gpm}$, $p_{\max} = 5000 \text{ psi}$

pilot operated, spool type, mechanically adjustable

Type series: DRPA-5D-10-...




- Screw-in cartridge valve
- For cavity DD
- All external parts with zinc-nickel plating according to DIN EN ISO 19598
- Installation in threaded port body type DDY-12
- 2-way with external oil drain
- Very stable operation
- Tightening torque not affecting the function
- Also available as stack valve
- Seated pilot stage

Description

These two-stage pressure valves, series DRPA-5D-10-..., are size 10, screw-in cartridge valves with a seated pilot stage and an M24×1.5 mounting thread. They are designed on the proven sliding-spool principle. The spring chamber is drained with an additional connection. The pressure applied to the secondary connection has no influence on the setting of the valve. To obtain a reliable pressure setting over the entire pressure range, the overall pressure range is

divided into different pressure levels. These valves are mainly used in certain mobile and industrial applications to reduce the system pressure. The pressure is set by means of an adjusting spindle. All external parts of the screw-in valves are zinc-nickel plated and are thus suitable for use in the harshest operating environments. For installation and further information, please refer to the section related data sheets.

Symbol



Technical data


General characteristics	Description, value, unit
Function group	Pressure valve
Function	Reducing function
Design	Screw-in cartridge valve
Controls	mechanically adjustable
Characteristic	pilot operated, spool type
Construction size	NG 10
Thread size	M24×1,5
Mounting attitude	unrestricted
Weight	0.51 lb
Cavity acc. factory standard	For cavity DD
Tightening torque steel	48 ft·lb
Tightening torque aluminium	37 ft·lb
Tightening torque tolerance	± 10 %
Minimum ambient temperature	- 22 °F
Maximum ambient temperature	+ 176 °F
Surface protection	All external parts with zinc-nickel plating according to DIN EN ISO 19598
Sealing material	see ordering code
Seal kit order number	NBR: DS-216-N / FKM: DS-216-V

Hydraulic characteristics	Description, value, unit
Maximum operating pressure	5000 psi
Maximum flow rate	31 gpm
Flow direction	see symbol
Hydraulic fluid	HL and HLP mineral oil according to DIN 51 524; other fluids on request!
Minimum fluid temperature	- 22 °F
Maximum fluid temperature	+ 176 °F
Viscosity range	10 ... 650 mm ² /s (cSt)
Recommended viscosity range	15 ... 250 mm ² /s (cSt)
Minimum fluid cleanliness (cleanliness class according to ISO 4406:1999)	class 20/18/15
Pilot-oil consumption	A to Z: ca. 0.079 gpm
Minimum set pressure	140 psi
Maximum set pressure	5000 psi
Pressure adjustment range	pressure range L: 1 turn = ca. 180 psi pressure range M: 1 turn = ca. 540 psi pressure range N: 1 turn = ca. 940 psi


Performance graphs

measured with oil viscosity 33.0 mm²/s (cSt)


$\Delta p = f(Q)$ Pressure drop-flow rate characteristic

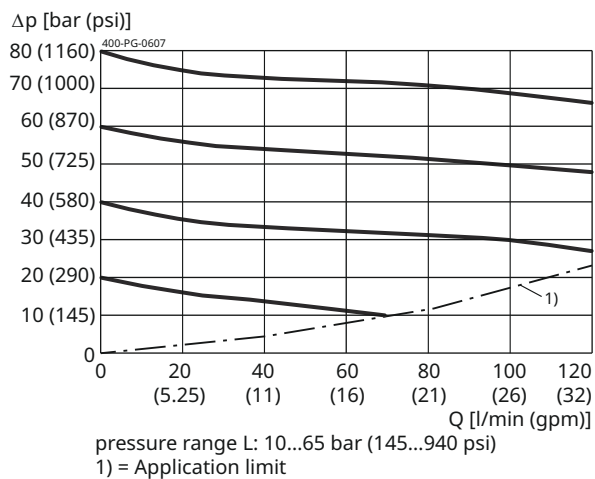

$\Delta p = f(Q)$ Pressure drop-flow rate characteristic

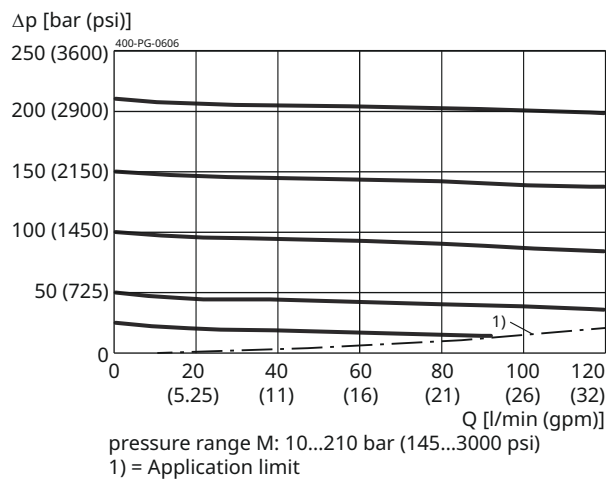

$\Delta p = f(Q)$ Pressure drop-flow rate characteristic

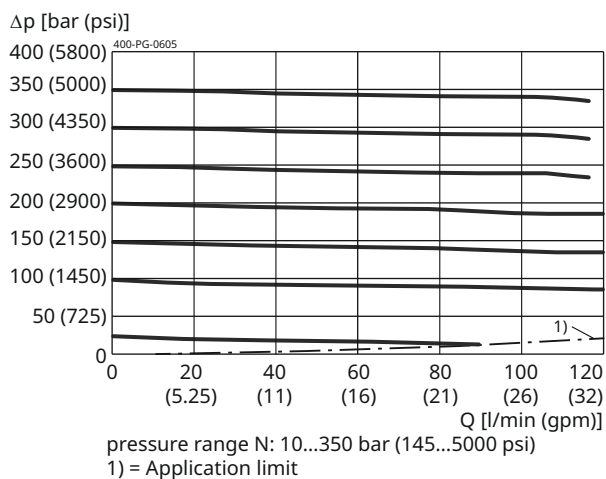

Ordering code

	Ex.	D	R	P	A	-	5	D	-	10	-	S	N	N	-	3
D	=	pressure-control valve														
R	=	pilot operated														
P	=	cartridge design														
A ... Q	=	standard model according to valid data sheet														
Z ... R	=	special model (on request)														
5	=	pressure-reducing with external spring space relief														
D	=	cavity type DD														
10	=	nominal size 10														
S	=	with screwable manual override														
H	=	manual override with hand knob														
L	=	pressure range 10...65 bar / 145...940 psi (light spring)														
M	=	pressure range 10...210 bar / 145...3000 psi (medium spring)														
N	=	pressure range 10...350 bar / 145...5000 psi (normal spring)														
N	=	NBR (nitril-butadien-rubber / BUNA) seals (standard)														
V	=	FKM (fluorocarbon rubber / VITON) seals (special seals on request)														
1 ... 9	=	technical design no. (omit by ordering)														



IMPORTANT!

When required, the tamper-proof cap (the adjustment seal) must be ordered separately in plain language.

Related data sheets

Reference	Description
400-P-040011	Form tools
400-P-060121	Cavity DD
400-P-740112	Threaded port body DDY-12

info.ch@bucherhydraulics.com

www.bucherhydraulics.com

© 2025 by Bucher Hydraulics AG Frutigen, 3714 Frutigen, Switzerland

All rights reserved.

Data is provided for the purpose of product description only, and must not be construed as warranted characteristics in the legal sense. The information does not relieve users from the duty of conducting their own evaluations and tests. Because the products are subject to continual improvement, we reserve the right to amend the product specifications contained in this catalogue.