


# Lock valve

## Spring loaded check valve

$Q_{\max} = 800 \text{ l/min}$ ,  $p_{\max} = 420 \text{ bar}$

poppet type

Type series: RVSAE3/6-11/2"

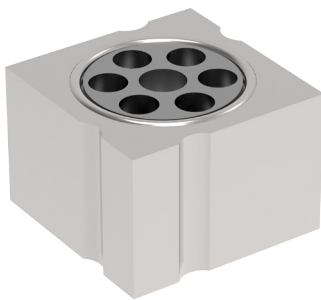



- For SAE flange ports
- High pressure rating
- Compact construction
- No-flow direction can be reversed
- The same valve body is used for 3000 psi and 6000 psi ports
- Optional metered flow in the no-flow direction

### Description

Check valves for SAE flange ports are characterized by very high load capacity and very small pressure rise. The valve can be used without modification on both 3000 psi (210 bar) and 6000 psi (420 bar) SAE flange ports. The no-flow direction can be reversed by inverting the valve. The valve design is based on a guided poppet that is hardened and ground. In the no-flow

direction, the valve closes. The valve can be used for pressure relief in the opening direction, but only to a limited extent (consult Bucher Hydraulics for such applications). Seal plates and insert plates are available as required. The valve is available in nominal sizes  $\frac{3}{4}$ ", 1", 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ " and 2".

### Symbol



## Technical data

General characteristics	Description, value, unit
Function group	Lock valve
Function	Spring loaded check valve
Characteristic	poppet type
Construction size	SAE 1 1/2"
Mounting attitude	unrestricted
Weight	1.06 kg

Hydraulic characteristics	Description, value, unit
Maximum operating pressure	420 bar
Maximum flow rate	800 l/min
Flow direction	see symbol
Hydraulic fluid	HL and HLP mineral oil according to DIN 51 524; other fluids on request!
Minimum fluid temperature	- 30 °C
Maximum fluid temperature	+ 80 °C
Viscosity range	10 ... 500 mm <sup>2</sup> /s (cSt)
Minimum fluid cleanliness (cleanliness class according to ISO 4406:1999)	class 20/18/15
Opening pressure	0.2 / 0.5 / 1 / 2 / 4 bar




### NOTE!

For other values please contact Bucher Hydraulics.

## Performance graphs



measured with oil viscosity 33.0 mm<sup>2</sup>/s (cSt)

$p = f(Q)$  Pressure-flow rate  
 $\Delta p = f(Q)$  Pressure drop-flow rate characteristic

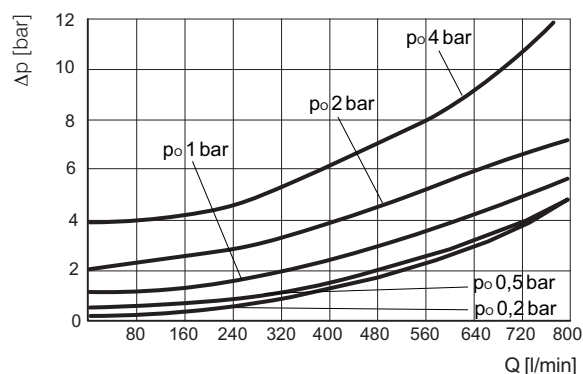


## Dimensions and sectional view

### Dimensions – valves

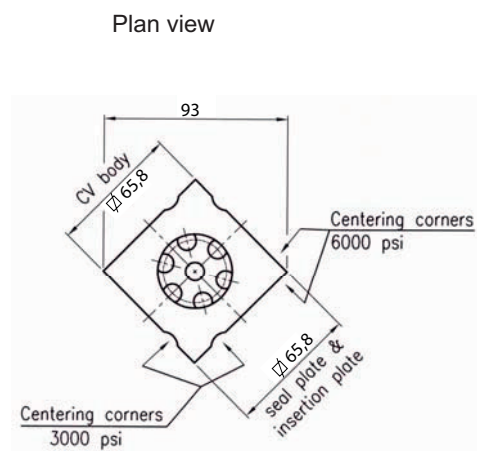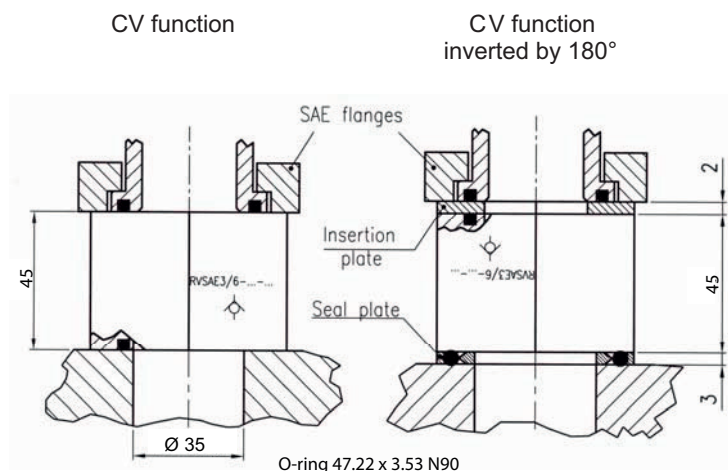


### Dimensions – SAE flange ports


6000 psi (420 bar)

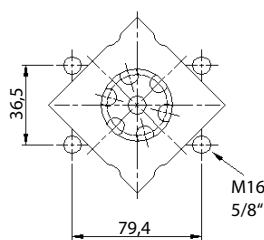

3000 psi (210 bar)



Minimum distance between 2 SAE check valves

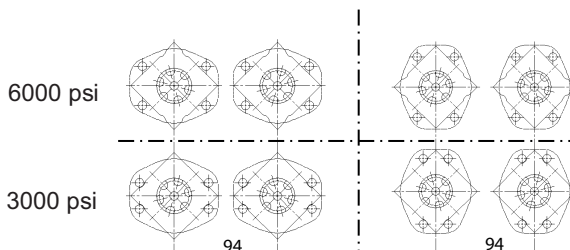

## Installation information



### NOTE!

The SAE flange mounting screws have to be tightened with the specified torque. The value can be found in the chapter technical data. By turning them through 90°, the RVSAE3/6... dual purpose bodies, the seal plates and insert plates can be used on both 3000 psi and 6000 psi ports of the same nominal size. Where a seal plate and an insert plate are added, it is seldom necessary to fit longer SAE flange connecting bolts. When we choose to add orifices or nozzles to the circuit they are to be placed after the check valve. If this is not possible, a right-angle bore must be designated between the check valve and the nozzle (see datasheet 170-P-059000).



### ATTENTION!

When fitting the valve, make sure that it is firmly seated on the sealing surface and that it is not deformed by the use of excessive force.



## Related data sheets

Reference	Description
170-P-059000	Using nozzles or orifices before a check valve