

Valve accessory Threaded port body

Type series: GAYA




- For cavity AY
- All external parts with zinc-nickel coating according to DIN EN ISO 19598
- Functionless threaded port body
- Port sizes of the main connections G 3/8"
- Optimized Δp values
- Suitable for piping assembly
- Can be fixed with 2x cap screws

Technical data

General Characteristics	Description, value, unit
Function group	Valve accessory
Function	Threaded port body
Maximum operating pressure	250 bar
Weight	1.27 kg
Cavity acc. factory standard	For cavity AY
Surface protection	All external parts with zinc-nickel coating according to DIN EN ISO 19598



Dimensions and sectional view

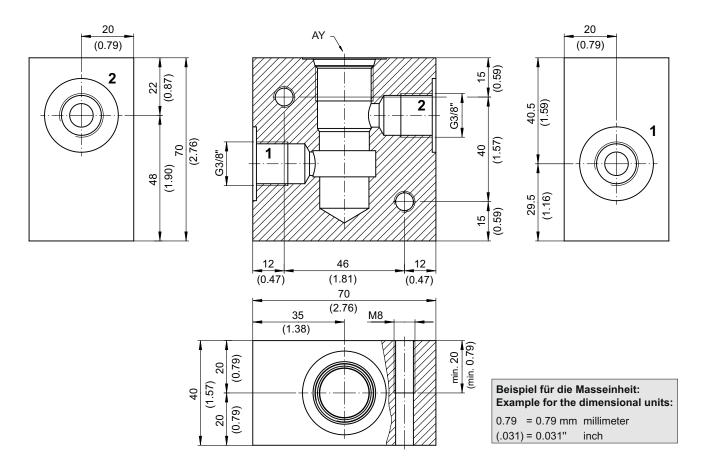

info.ch@bucherhydraulics.com

www.bucherhydraulics.com

© 2021 by Bucher Hydraulics AG Frutigen, 3714 Frutigen, Switzerland

All rights reserved.

Type series: GAYA

Data is provided for the purpose of product description only, and must not be construed as warranted characteristics in the legal sense. The information does not relieve users from the duty of conducting their own evaluations and tests. Because the products are subject to continual improvement, we reserve the right to amend the product specifications contained in this catalogue.