

Valve accessory Threaded port body

Type series: GLA-11...



- For cavity LA/C1620
- All external parts with zinc-nickel plating according to DIN EN ISO 19598
- Functionless threaded port body
- Port sizes of the main connections G 1"
- Optimized Δp values
- Suitable for piping assembly
- Can be fixed with 2× cap screws


Technical data


General characteristics	Description, value, unit
Function group	Valve accessory
Function	Threaded port body
Maximum operating pressure	420 bar
Weight	2.74 kg
Cavity acc. factory standard	For cavity LA/C1620
Surface protection	All external parts with zinc-nickel plating according to DIN EN ISO 19598


1/2



Dimensions and sectional view




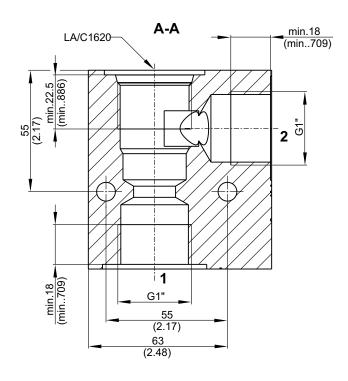



Beispiel für die Masseinheit: Example for the dimensional units: 0.79 = 0.79 mm millimeter (.031) = 0.031" inch

Ordering code

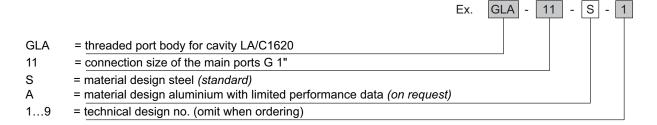

info.ch@bucherhydraulics.com

www.bucherhydraulics.com

© 2022 by Bucher Hydraulics AG Frutigen, 3714 Frutigen, Switzerland

All rights reserved.

Data is provided for the purpose of product description only, and must not be construed as warranted characteristics in the legal sense. The information does not relieve users from the duty of conducting their own evaluations and tests. Because the products are subject to continual improvement, we reserve the right to amend the product specifications contained in this catalogue.