


Lock valve Spring-loaded non-return valve

Precision Line | Performance Line | **Value Line**

$Q_{\max} = 80 \text{ l/min}$, $p_{\max} = 220 \text{ bar}$

ball type,

Type series: RKVE-G-08-__-VD22



- Screw-in cartridge valve
- Unhardened cost optimized version
- Exceptionally high Q_{\max} with extremely low Δp
- No soft seal, thus not depending on temperature and pressure fluid
- Virtually leak-proof in closed condition

Symbol



Description

The spherical poppet-type check valve of the RKVE-VD22 series is a cost-optimized alternative to the RKVE-VD for applications up to 220 bar. This series is characterized by very high pressure load capacity and extremely low Δp . Compared with the RKVE..., the permissible flow rate for the RKVE...-VD22 valve series has been increased by 50% for the same pressure differential. Valve seat,

poppet and body are unhardened. The valve has a cutting edge for metal-to-metal sealing. By eliminating the soft seal, the valve can be applied without regard to temperature and pressure fluid. The valves prevent flow in the screw-in direction (B to A) and open in the opposite direction. The valve is available in nominal sizes 04, 06, 08 and 10.

Technical data

General characteristics

General characteristics	Description, value, unit
Function group	Lock valve
Function	Spring-loaded non-return valve
Design	Screw-in cartridge valve
Characteristic	ball type
Construction size	nominal size 08
Thread size	G 3/8"
Mounting attitude	unrestricted
Weight	0.013 kg
Tightening torque steel	25 Nm

Hydraulic characteristics

Hydraulic characteristics	Description, value, unit
Maximum operating pressure	220 bar
Maximum flow rate	80 l/min
Nominal flow rate	50 l/min
Flow direction	see symbol
Hydraulic fluid	HL and HLP mineral oil according to DIN 51 524; other fluids on request!
Minimum fluid temperature	- 30 °C
Maximum fluid temperature	+ 120 °C
Viscosity range	10 ... 500 mm ² /s (cSt)
Minimum fluid cleanliness (cleanliness class according to ISO 4406:1999)	class 20/18/15
Opening pressure	0.2 / 0.5 / 1.0 bar



NOTE!


For other values please contact Bucher Hydraulics.

Performance graphs

measured with oil viscosity 33.0 mm²/s (cSt)

$\Delta p = f(Q)$ Pressure drop-flow rate characteristic


Δp [bar]

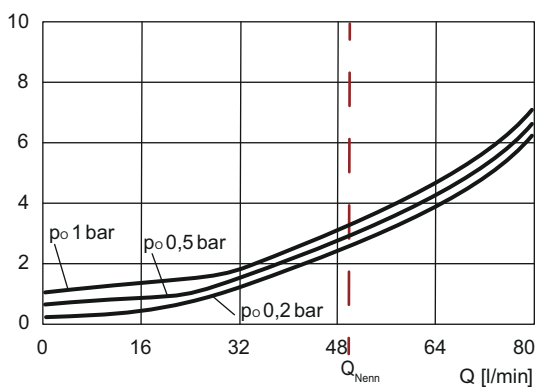

Dimensions and sectional view

RKVE-G-08-_-VD22

The dimensions specified apply to the mounted state.

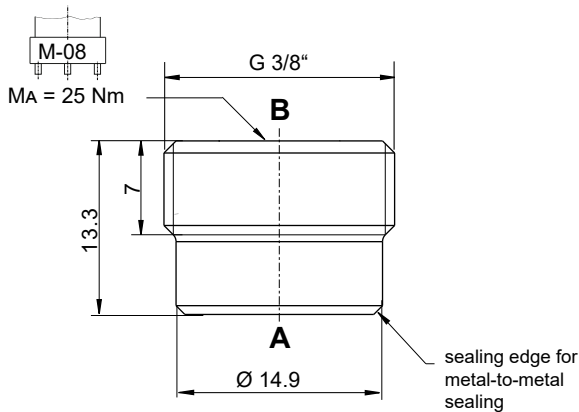

For cavity REG-02



NOTE!

When fitting the screw-in cartridge valve, use the specified tightening torque. The value can be found in the chapter "Technical data".

Orifices or nozzles are to be placed after the check valve. If this is not possible, a right-angled bore must be designated between the check valve and the nozzle. (see data sheet 170-P-059000).

Suitable fitting tools are available at Bucher Hydraulics (see data sheet 170-P-051600).



ATTENTION!

When fitting the valve, make sure that it is firmly seated on the sealing surface and that it is not deformed by the use of excessive force.

Application Notes



NOTE!

The maximum operating pressure must not be exceeded even when pressure peaks occur. In applications such as accumulator circuits, where sudden pressure can be applied to the valve in the free-flow direction, ensure that the specified flow ratings are not exceeded. Buyers bear the sole responsibility for ensuring that the valve is suitable for their applications and must be substantiated by trials or testing, if necessary.



ATTENTION!

The valves are only suitable for pressure relief in the opening direction to a limited extent. (if necessary, please consult Bucher Hydraulics).

Ordering code

RKVE - G - 08 - 02 - VD22

RKVE	=	check valve, screw-in type, spherical poppet
G	=	whitworth pipe thread G3/8"
08	=	nominal size 08, Q _{Nominal} 50 l/min
02	=	opening pressure 0,2 bar (Item Number: 170648540)
05	=	opening pressure 0,5 bar (Item Number: 170648541)
1	=	opening pressure 1 bar (Item Number: 170648542)
VD22	=	unhardened, cost-optimized version for max. 220 bar

Related data sheets

Reference	Description
170-P-059000	Using nozzles or orifices before a Check Valve
170-P-051600	Mounting tool for check valves RKVE... and RV...
170-P-080012	Cavity REG-02-08

info.de@bucherhydraulics.com
www.bucherhydraulics.com

© 2026 by Bucher Hydraulics Dachau GmbH, 85221 Dachau, Germany

All rights reserved.

Data is provided for the purpose of product description only, and must not be construed as warranted characteristics in the legal sense. The information does not relieve users from the duty of conducting their own evaluations and tests. Because the products are subject to continual improvement, we reserve the right to amend the product specifications contained in this catalogue.