

Directional valve 2-way/2-position

$Q_{\max} = 140 \text{ l/min}$, $p_{\max} = 350 \text{ bar}$
pilot operated, poppet type, switching solenoid
Type series: WS22GN_HA-10...




- Screw-in cartridge valve
- For cavity DH
- All external parts with zinc-nickel plating according to DIN EN ISO 19598
- Installation in threaded port body type GCDHA
- With bidirectional seat-valve shut-off
- High flow rates
- Compact construction
- Low head loss
- Version with return spring for main spool (on request)
- De-energized closed
- The slip-on coil can be rotated, and it can be replaced without opening the hydraulic envelope
- High pressure wet-armature solenoids
- Various plug-connector systems and voltages are available

Description

The 2-way/2-position solenoid-operated directional valves, series WS22..., are size 10, two stage, high performance screw-in valves with an M27×2 mounting thread. The main and pilot stages are both designed on the poppet/seat principle, and they are therefore virtually leak-free in both directions of flow (bidirectional seat-valve shut-off). All external parts of the screw-in valves are zinc-nickel plated and are thus suitable for use in the harshest operating environ-

ments. The slip-on coils can be replaced without opening the hydraulic envelope and can be positioned at any angle through 360°. These screw-in valves are predominantly used in certain mobile and industrial applications where leak-tight shut-off functions are crucially important. Examples are where loads, tensions, or clamping forces must be held without leakage. For self-assembly, please refer to the section related data sheets.

Symbol



Technical data

General characteristics	Description, value, unit
Function group	Directional valve
Function	2-way/2-position
Design	Screw-in cartridge valve
Controls	switching solenoid
Characteristic	pilot operated, poppet type
Construction size	NG 10
Thread size	M27×2
Mounting attitude	unrestricted
Weight	0.52 kg
Cavity acc. ISO	fits into ISO 7789: 27-01-0-07
Cavity acc. factory standard	For cavity DH
Tightening torque steel	80 Nm
Tightening torque aluminium	80 Nm
Tightening torque tolerance	± 10 %
Minimum ambient temperature	- 30 °C
Maximum ambient temperature	+ 80 °C
Surface protection	All external parts with zinc-nickel plating according to DIN EN ISO 19598
Sealing material	see ordering code
Seal kit order number	NBR: DS-367-N / FKM-DS-367-V

Hydraulic characteristics	Description, value, unit
Maximum operating pressure	350 bar
Maximum flow rate	140 l/min
Flow direction	see symbol
Hydraulic fluid	HL and HLP mineral oil according to DIN 51 524; other fluids on request!
Minimum fluid temperature	- 30 °C
Maximum fluid temperature	+ 80 °C
Viscosity range	10 ... 500 mm ² /s (cSt)
Recommended viscosity range	15 ... 250 mm ² /s (cSt)
Minimum fluid cleanliness (cleanliness class according to ISO 4406:1999)	class 20/18/15


Electric characteristics	Description, value, unit
Actuator type	solenoid coil
Solenoid coils type	D36
Supply voltage DC	12/24 V DC
Supply voltage AC	115/230 (50 ... 60 Hz) V AC
Supply voltage tolerance	± 10 %
Nominal power consumption	V DC = 27 W / V AC = 25 W
Relative duty cycle	100 %
Minimum ambient temperature	- 30 °C

Electric characteristics	Description, value, unit
Maximum ambient temperature	+ 50 °C
Electrical connection coil	several connection types available, see ordering code
Protection class solenoid coil to ISO 20 653 / EN 60 529	several classes of protection available, see ordering code (with appropriate mating connector and proper fitting and sealing)


Performance graphs

measured with oil viscosity 33.0 mm²/s (cSt), coil at steady-state temperature and 10 % undervoltage

$p = f(Q)$ Performance limit

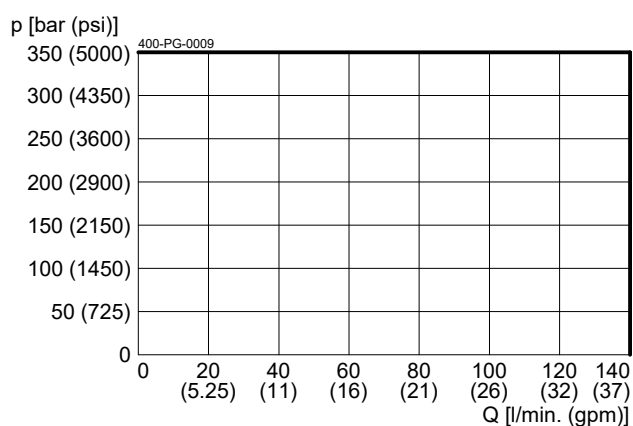


$\Delta p = f(Q)$ Pressure drop-flow rate characteristic

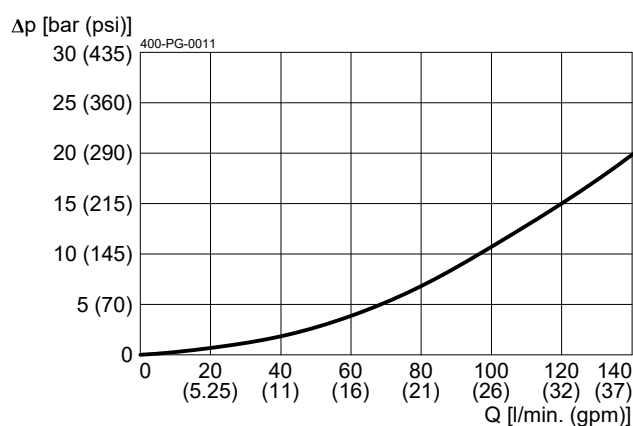

Return spring for main spool


Version "R": Rückstellfeder für Hauptkolben. /
Version "R": Return spring for main spool.

Zur Unterstützung der Schliesskraft.
Gleichzeitig wird das Δp beim Öffnen erhöht. /
To assist the closing force.
This results in a higher Δp when opening.

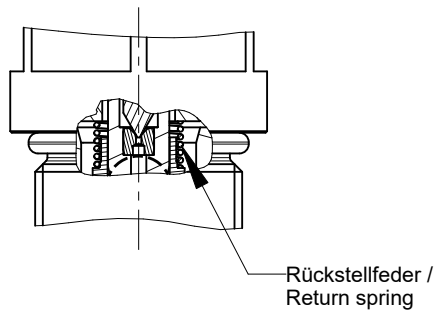

$\Delta p = f(Q)$ Druckverlust-Volumenstrom

Mit Rückstellfeder / With return spring
 Δp [bar (psi)]

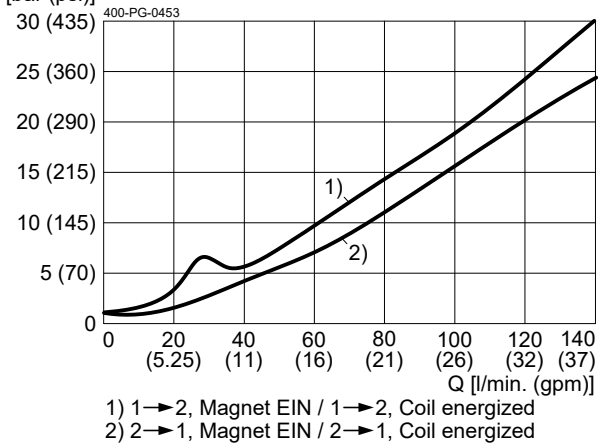

Ordering code

Ex.

W	S	22G	N		H	A	-	10		-	1		24	D	-	
---	---	-----	---	--	---	---	---	----	--	---	---	--	----	---	---	--

W = directional valve

S = bidirectional seat-valve shut-off, seated design

22G = 2-way/2-position function, de-energized closed

N = electrically operated, V DC = 27 W / V AC = 25 W

(blank) = without return spring for main spool **(standard)**

R = with return spring for main spool (on request)

H = cavity type DH

A ... Q = standard model according to valid data sheet

Z ... R = special model (on request)

10 = nominal size 10

(blank) = NBR (nitril-butadien-rubber / BUNA) seals **(standard)**

V = FKM (fluorocarbon rubber / VITON) seals
(special seals on request)

1 ... 9 = technical design no. (omit by ordering)

... = voltage e.g. 24 (24 V)

D = current DC

A = current AC

(blank) = DIN EN 175301-803 connection	3-pole 2 P+E (standard)	(IP 65)	with mating plug
T = DIN EN 175301-803 connection	3-pole 2 P+E, with protection diode	(IP 65)	
M100 = DIN EN 175301-803 connection	3-pole 2 P+E	(IP 65)	} mating plug not supplied
J = Junior Timer plug connection	2-pole radial	(IP 65)	
JT = Junior Timer plug connection	2-pole radial, with protection diode	(IP 65)	
I = Junior Timer plug connection	2-pole axial	(IP 65)	
IT = Junior Timer plug connection	2-pole axial, with protection diode	(IP 65)	
D = Deutsch plug connection DT04-2P	2-pole 45°	(IP 67/69K)	
DT = Deutsch plug connection DT04-2P	2-pole 45°, with protection diode	(IP 67/69K)	

other plug-variants, please consult BUCHER.



IMPORTANT!

Not every combination of voltage values, current type and plug connections available.

Related data sheets

Reference	Description
400-P-040011	Form tools
400-P-120110	Solenoid coil D36
400-P-060171	Cavity DH
400-P-740161	Threaded port body GCDHA

info.ch@bucherhydraulics.com

www.bucherhydraulics.com

© 2025 by Bucher Hydraulics AG Frutigen, 3714 Frutigen, Switzerland

All rights reserved.

Data is provided for the purpose of product description only, and must not be construed as warranted characteristics in the legal sense. The information does not relieve users from the duty of conducting their own evaluations and tests. Because the products are subject to continual improvement, we reserve the right to amend the product specifications contained in this catalogue.