


Directional valve 2-way/2-position

$Q_{\max} = 80 \text{ l/min}$, $p_{\max} = 350 \text{ bar}$

pilot operated, poppet type, switching position monitored, switching solenoid

Type series: WR22GP_SADB-10...

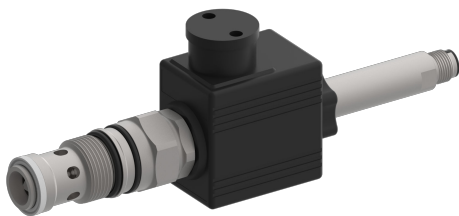


- Screw-in cartridge valve
- For cavity DD
- All external parts with zinc-nickel plating according to DIN EN ISO 19598
- Installation in threaded port body type DD-12
- No external pilot drain required
- With integral electronic monitoring of operating position
- Seat tight shut-off from B to A
- Various plug-connector systems and voltages are available
- The slip-on coil can be rotated, and it can be replaced without opening the hydraulic envelope
- High pressure wet-armature solenoids

Description


These 2/2 solenoid-operated cartridge valves, series WR22GPS..., feature monitoring of the operating positions and are size 10, two stage, high performance screw-in cartridges with an M24×1.5 mounting thread. The main and pilot stages are both designed on the poppet/seat principle, and the B to A flow path is therefore virtually leak-free. The safe switch position is always the non-operated valve position. To ensure that electrical line interruptions of any kind do not result in unsafe conditions, the sensor's switch output is always at High in the non-operated state. The safe switch position is considered to have been reached when the spool is in the overlap state. These screw-in valves are predominantly used in certain mobile

and industrial applications where leak-tight shut-off functions are crucially important. Examples are where loads, tensions, or clamping forces must be held without leakage, or where an operating position must be monitored. All external parts of the cartridge are zinc-nickel plated according to ISO EN DIN 19 598 and are thus suitable for use in the harshest operating environments. The slip-on coils can be replaced without opening the hydraulic circuit or removing the electronics (sensor), and can be positioned at any angle through 360°. If you intend to install the valve yourself, please refer to the section "Related data sheets".

Symbol



Simplified

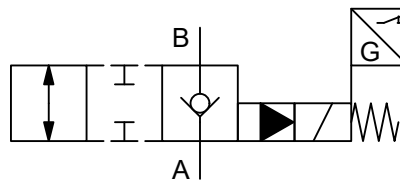

Detailed

Technical data

General characteristics	Description, value, unit
Product status	Phase-Out
Alternative product	WRVP22GP_-SA-10F-... (400-P-131119)
Function group	Directional valve
Function	2-way/2-position
Design	Screw-in cartridge valve
Controls	switching solenoid
Characteristic	pilot operated, poppet type, switching position monitored
MTTFd value	150 years
Construction size	NG 10
Thread size	M24×1,5
Mounting attitude	unrestricted
Weight	0.75 kg
Cavity acc. factory standard	For cavity DD
Tightening torque steel	65 Nm
Tightening torque aluminium	50 Nm
Tightening torque tolerance	± 10 %
Minimum ambient temperature	- 30 °C
Maximum ambient temperature	+ 40 °C
Surface protection	All external parts with zinc-nickel plating according to DIN EN ISO 19598
Sealing material	see ordering code
Seal kit order number	NBR: DS-281-N / FKM: DS-281-V

Hydraulic characteristics	Description, value, unit
Maximum operating pressure	350 bar
Maximum flow rate	80 l/min
Flow direction	see symbol
Hydraulic fluid	HL and HLP mineral oil according to DIN 51 524; other fluids on request!
Minimum fluid temperature	- 30 °C
Maximum fluid temperature	+ 80 °C
Viscosity range	10 ... 500 mm ² /s (cSt)
Recommended viscosity range	15 ... 250 mm ² /s (cSt)
Minimum fluid cleanliness (cleanliness class according to ISO 4406:1999)	class 20/18/15



NOTE!

Slightly increased leakage is possible in dynamic use in the lowest temperature range.



IMPORTANT!

The maximum permissible ambient temperature is +50 °C (122 °F) with a relative duty cycle of 60% and a cycle time of 5 minutes.

Electric characteristics	Description, value, unit
Actuator type	solenoid coil
Solenoid coils type	36X48/16.1
Supply voltage DC	12/24 V DC
Supply voltage tolerance	± 10 %
Nominal power consumption	19 W
Switching time	Switching time measured at: UN: $\Delta p = 280 \text{ bar}$; $Q = 64 \text{ l/min}$; $T_{\text{Ambient}} = 40 \text{ °C}$; $\dot{V} = 46 \text{ mm}^2/\text{s}$ / 80 ms (energizing) / 80 ms (de-energizing) / A nach B: 88 ms (energizing) / 64 ms (de-energizing)
Relative duty cycle	100 %
Electrical connection coil	several connection types available, see ordering code
Protection class solenoid coil to ISO 20 653 / EN 60 529	several classes of protection available, see ordering code (with appropriate mating connector and proper fitting and sealing)



NOTE!


The switching time can be strongly dependent on flow rate, pressure, oil viscosity and the dwell time under pressure. In practice, the switching time may therefore deviate from the specified value range.

Sensor characteristics	Description, value, unit
Supply voltage (+Vs)	10...30 V DC
Maximum load current	100 mA
Short-circuit protection	Permanently resistant to load short circuit
Protection class sensor to ISO 20653 / EN 60529	IP 67 / IP 69K (with appropriate mating connector and proper fitting and sealing)
Vibration test	EN 60068-2-6 – 55 Hz, amplitude 1 mm, 3 axes, 30 min
Shock test	EN 60068-2-27 – half sine wave, 30 gn 11 ms half sine wave, 3 axes
EMC immunity	EN 61000-6-2
EMC interference emission	EN 61000-6-4
MTTF (40° C) according to EN ISO 13849-1 Annex C.5	320 years
MTTFD according to EN ISO 13849-1 Annex C.5.1	640 years
Electrical connection	device plug M12x1, 4-pin (male), A-coded


Performance graphs

measured with oil viscosity 33.0 mm²/s (cSt), coil at steady-state temperature and 10 % undervoltage

$p = f(Q)$ Performance limit

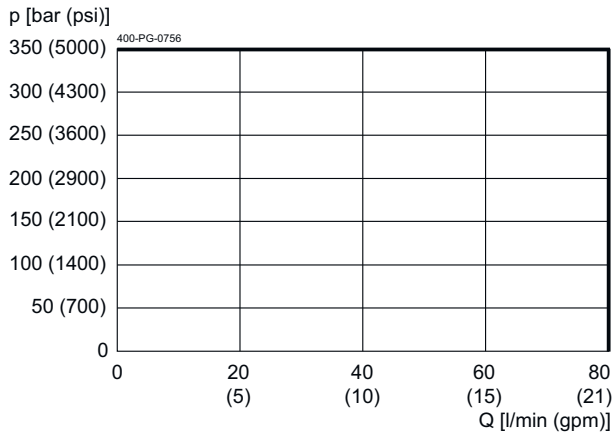

$\Delta p = f(Q)$ Pressure drop-flow rate characteristic

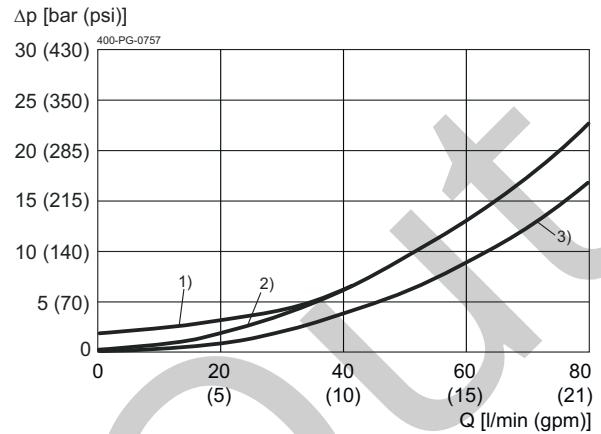


- 1) A → B solenoid de-energized
- 2) A → B solenoid energized
- 3) B → A solenoid energized

Dimensions and sectional view

Beispiel für die Masseinheit:
Example for the dimensional units:

0.79 = 0.79 mm millimeter
(.031) = 0.031" inch

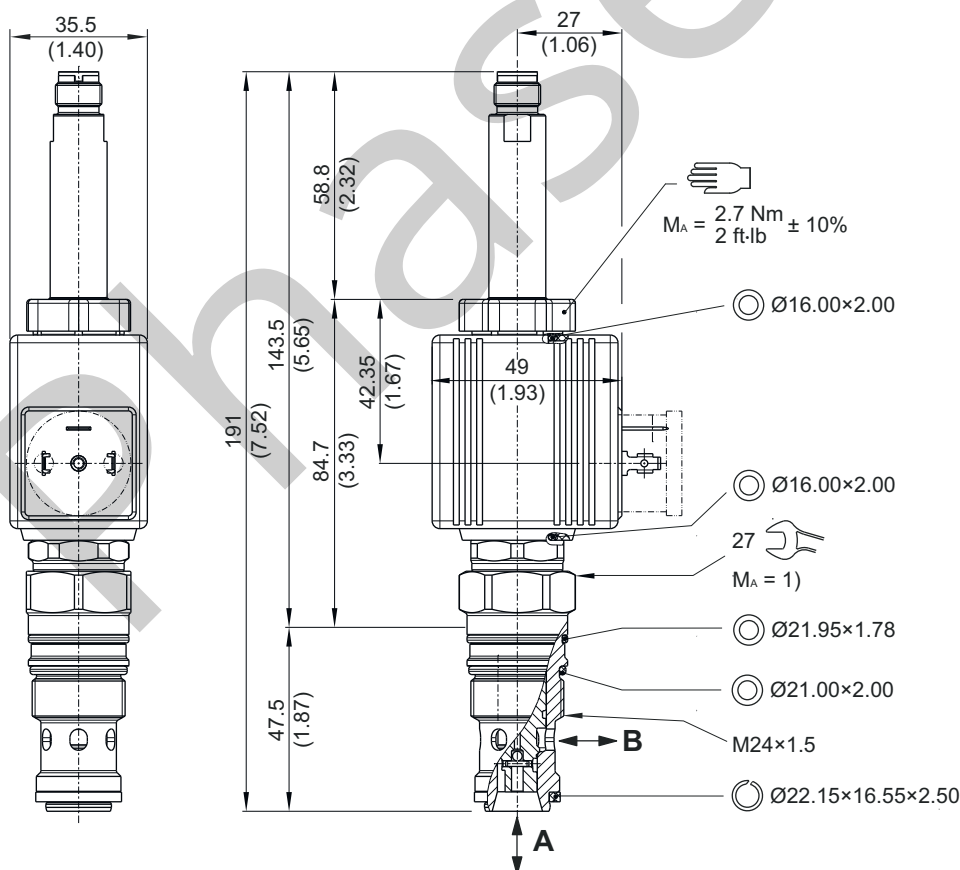

Installation information



NOTE!

1) When fitting the screw-in cartridge valve, use the specified tightening torque. The value can be found in the chapter "Technical data".



ATTENTION!

Only qualified personnel with mechanical skills may carry out any maintenance work. Generally, the only work that should ever be undertaken is to check, and possibly replace, the seals. When changing seals, oil or grease the new seals thoroughly before fitting them.



ATTENTION!

Using screw-in valves and components that include monitoring of the operating position: do not use the signal from the position switch to directly activate a safety-related control function. In addition, only use solenoid coils that have a protection diode.



ATTENTION!

The safe switch position is the non-operated valve position. In accordance with the criteria for proven safety principles, the status of the position signal changes during the overlap stroke (before the valve actually opens).



IMPORTANT!

When connecting the sensor (for monitoring the operating position), note the information regarding pin assignment in this data sheet. The sensor cable must not be subjected to any pulling forces. Note also that opening the screw-in valve or removing the electronics (sensor) is not permitted!



NOTE!


The seals are not available individually. The seal kit order number can be found in the chapter "Technical data".




NOTE!

To achieve the screw-in valve's maximum performance rating, fit the solenoid coil as shown (with the plug pins nearest the valve body).

Return spring for main spool (on request)



*) additional return spring for the main spool

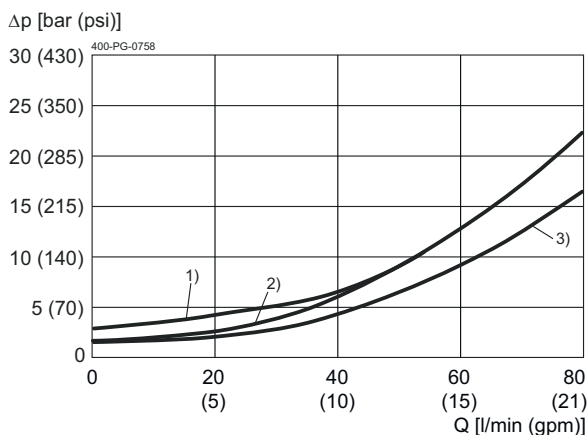


- 1) A → B solenoid de-energized
- 2) A → B solenoid energized
- 3) B → A solenoid energized

Connection diagram for sensor

Additional return spring for main spool to assist the closing force. This results in a higher D_p when opening.

Available on request, if a certain minimum order quantity is achieved.

Standard "A", 1 switching point:

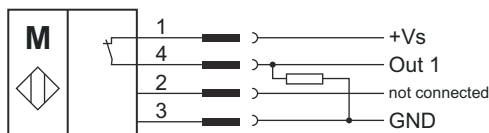

	Version A	
Valve status	Out 1	Out 2
Unactivated	high	-
Actuated	low	-

Ordering code

Ex.	W	R	22G	P	-	S	A	D	B	-	10	N	-	1	24	D	GR	-
W	=	directional valve																
R	=	CV-function, seat valve shut-off, pilot operated																
22G	=	2-way/2-position, de-energized closed																
P	=	electrically operated, V DC = 19 W																
(blank)	=	without return spring for main spool (standard)																
R	=	return spring for main spool (on request)																
S	=	with operating-position monitoring																
A	=	switching output PNP, normally closed																
D	=	cavity type DD (on request cavity type DC)																
A ... Q	=	standard model according to valid data sheet																
Z ... R	=	special model (on request)																
10	=	nominal size 10																
N	=	NBR (nitril-butadien-rubber / BUNA) seals (standard)																
V	=	FKM (fluorocarbon rubber / VITON) seals (special seals on request)																
1 ... 9	=	technical design no. (omit by ordering)																
...	=	voltage e.g. 24 (24 V)																
D	=	current DC																
GR	=	plug connection to DIN EN (with protection diode, IP 65) (standard)																
JR	=	Junior-Timer radial plug connection (with protection diode, IP65)																
UR	=	Deutsch plug connection (with protection diode, IP 65)																
(blank)	=	without mating plug																
Q	=	with mating plug (only by connection type "GR" possible)																

Related data sheets

Reference	Description
400-P-040011	Form tools
400-P-120112	Solenoid coil 36X48/16.1
400-P-060121	Cavity DD
400-P-740111	Threaded port body DD-12
400-P-010101	MTTFd Values for Hydraulic Valves

Phase-Out

info.ch@bucherhydraulics.comwww.bucherhydraulics.com

© 2025 by Bucher Hydraulics AG Frutigen, 3714 Frutigen, Switzerland

All rights reserved.

Data is provided for the purpose of product description only, and must not be construed as warranted characteristics in the legal sense. The information does not relieve users from the duty of conducting their own evaluations and tests. Because the products are subject to continual improvement, we reserve the right to amend the product specifications contained in this catalogue.